

Reolink-Duo Series P730-Spezifikationen

	Modell	Reolink Duo Series P730
Video & Audio	Bildsensor	1/2,7" CMOS Sensor
	Auflösung	Standard: 4608x1728 (8,0 Megapixel) bei 20 FPS
	Objektiv	f=3,2 mm fixiert, F=2,0
	Kompression	H.265
	Blickwinkel	Horizontal: 180°
		Vertikal: 60°
	Tag-/Nacht-Modus	Mit IR-Sperrfilter Automatische Umschaltung
	Infrarot-Nachtsicht	Bis zu 30 Meter (LED: 6 Stk./20 mil/850 nm)
	Farbige Nachtsicht	Spotlight: 8 Stk./5 W/6500 K/560 Lumen
Audio	Zwei-Wege-Audio	
Strom	PoE	IEEE 802.3af, 48V Active
	DC Strom	DC 12 V \Rightarrow 2 A, <12 W
Schnittstelle	Strom	DC Stromeingang
	System	Reset-Taste
	Ethernet	1 x 10 M/100 Mbps; RJ 45
	Speicherung	microSD-Kartenslot (bis zu 256 GB)
	Audio	Eingebautes Mikrofon und eingebauter Lautsprecher
Software & Funktion	Bildfrequenz	Mainstream: 4 fps – 20 fps (Standard: 20 fps)
		Substream: 4 fps – 20 fps (Standard: 10 fps)
	Bitrate	Mainstream: 3072 Kbps – 10240 Kbps (Standard: 8192 Kbps)
		Substream: 256 Kbps – 2048 Kbps (Standard: 1024 Kbps)
	Browser	Edge, Chrome, Firefox, Safari
	Betriebssystem	PC: Windows, Mac OS; Smartphone: iOS, Android
	Alarmer	Bewegungserkennung; Personen-/Fahrzeug-/Haustiererkennung
	Aufzeichnungsmodus	Bewegungsaufzeichnung (Standard); Aufzeichnung nach Zeitplan; 24/7 Aufzeichnung
	Protokoll & Standard	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Max. Benutzerzugriff	20 Benutzer (1 Administrator-Konto & 19 Benutzerkonten); Unterstützt bis zu 12 simultane Videostreams (10 x Substream & 2 x Mainstream).	
Arbeitet mit	Google Assistant	
Arbeitsumgebung	Temperatur	Arbeitstemperatur: -10°C – +55°C (14°F – 131°F)
	Feuchtigkeit	Arbeitsfeuchtigkeit: 10% – 90%
	Wetterfestigkeit	IP66
Größe & Gewicht	Dimensionen	195 x 103 x 56 mm
	Gewicht	680 g
Garantie	Eingeschränkte Garantie	2-Jahre eingeschränkte Garantie. Für Support besuchen Sie bitte: https://support.reolink.com/hc/en-us/

Duo Series P730

Smart 4K Dual-Lens PoE Camera with 180° Panoramic View



Dual-Lens

Combines two lenses into one view with no dead ends.



180° Panorama

Covers a larger area with a 180° ultra-wide viewing angle.

ULTRA
HD

4K UHD

Reveals much finer details with stunning 4K clarity.



Smart Detection

Get notified when a person, vehicle, or animal is detected.



Color Night Vision

Captures full-color images at night with its spotlights on.



Two-Way Audio

Talk to anyone in front of the camera in real-time.



Power over Ethernet

Transmit data and power with only one Ethernet cable.



IP66 Weatherproof

Works perfectly indoors or outdoors no matter the weather.



Multiple Storage Options

Save videos to a microSD card, Reolink NVR or FTP server.



Double Your Vision

The dual-lens camera can stitch two views into one with no gap. It covers a larger area with a 180° panoramic view.



Full-Color 4K Videos, Day or Night

Get razor-sharp, full-color recordings in 4K clarity day or night. Never miss any important details.



Know What's Happening

Get alerts only when people, vehicles, and animals are detected, reducing false alarms caused by shadows and flying insects.



All-Round Deterrence to Intruders

Deter intruders effectively with spotlights on or the siren activated. Or scare off unwanted guests using two-way audio.



Flexible Storage Options


Save your recordings to a microSD card of up to 256 GB, Reolink NVR, or FTP server. Choose as you like.

Gallery



One App/Client for All Control

Stay connected to your home or business anytime, anywhere.

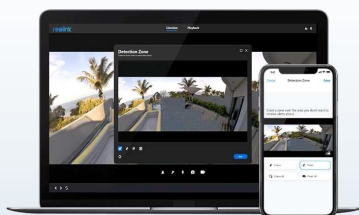

Privacy in Your Hands

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.



Model	Duo Series P730	
Video & Audio	Image Sensor	1/2.7" CMOS Sensors
	Video Resolution	Default: 4608X1728 (8.0 megapixels) at 20 fps
	Lens	f = 3.2 mm fixed, F = 2.0
	Video Format	H.265
	Field of View	Vertical: 60° Horizontal: 180°
	Day & Night	Auto-switching with IR cut filter
	Infrared Night Vision	30 meters (LED: 6pcs/20mil/850nm)
	Color Night Vision	Spotlight: 8pcs/5W/6500K/560 Lumens
	Audio	Two-way audio
Power	PoE	IEEE 802.3af, 48V Active
	DC Power	DC 12V==2A, <12W
Interface	Power	DC power port
	System	Reset button
	Ethernet	One 10M/100Mbps; RJ45
	Storage	microSD card slot (Max. 256GB)
	Audio	Built-in microphone and speaker
Software Features	Frame Rate	Mainstream: 4fps - 20fps (default: 20fps) Substream: 4fps - 20fps (default: 10fps)
	Code Rate	Mainstream: 3072-10240Kbps (default: 8192kbps) Substream: 256-2048Kbps (default: 1024kbps)
	Browser Supported	Edge, Chrome, Firefox, Safari
	OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
	Smart Alarm	Motion detection; person detection; vehicle detection; animal detection
	Record Mode	Motion-triggered recording (default); scheduled recording; 24/7 recording
	Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP,DNS, DDNS, FTP, P2P
	Maximal User Access	20 Users (1 admin account & 19 user accounts); Supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
	Work with	Google Assistant
Working Environment	Temperature	Operating temperature: -10°C~+55°C (14°F~131°F)
	Humidity	Operating humidity: 10% ~ 90%
	Waterproof	IP66
Size & Weight	Dimension	195x103x56 mm
	Weight	680g
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/



- 1 Lens
- 2 Daylight Sensor
- 3 Spotlight
- 4 IR LED
- 5 Mic
- 6 Mounting Bracket



- 1 microSD Card Slot
- 2 Reset Button
- 3 Speaker



1 Power

2 Network

3 Waterproof Lid



1 You can mount the cam on the wall or on the ceiling.

2 You can loosen the screw to adjust the cam in any direction, and then tighten the screw to fix the cam.

What's in the Box

Duo Series P730 (x1)

Mounting Hole Template (x1)

Pack of Screws (x1)

Mounting Plate (x1)

Quick Start Guide (x1)

Surveillance Sticker (x1)

Waterproof Lid (x1)

1m Network Cable (x1)

Screwdriver (x1)

Best Companion



RLA-PS1 (PoE Switch)



microSD Card



Ethernet Cable



Waterproof Lid



RLA-PS1 (PoE Switch)



Remote Access & Control

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>