

SPECIFICATIONS








Product Name	MPG A1000G PCIE5
Form Factor	ATX
Power Wattage	1000W
Efficiency Rating	80 PLUS Gold (up to 90%)
Modular	YES (Fully-Modular)
Fan Size	135 mm
Fan Bearing	Fluid Dynamic Bearing
Dimensions (D x W x H)	150 x 150 x 86mm / 5.9 x 5.9 x 3.4 inches
PFC Type	Active PFC
Input Voltage Range	100-240~
Input Frequency Range	50~60Hz
Protection	OCP,OVP,OPP,OTP, SCP,UVP

- 80 PLUS Gold Certification
- PCIe 5.0 and ATX 3.0 **Compatible**
- 100% Japanese Electrolytic capacitor
- Full Modular design
- Active PFC design
- Industrial level protection with OCP,OVP,OPP,OTP, SCP,UVP
- DC-DC Module Design
- Flat Cables
- Single Rail Design
- Fan 0 RPM Mode







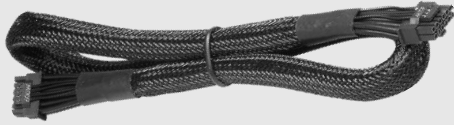







MPG A1000G PCIE5

AC INPUT	100-240~, 13A, 50-60Hz, (200-240~, 6.5A, 50-60Hz (仅适用中国))				
DC output	+5V	+3.3V	+12V	-12V	+5Vsb
	22.0A	22.0A	83.5A	0.3A	3.0A
	120W	1000W	3.6W	15W	
Total power	1000W				

CONNECTOR

						
ATX (24 PIN)	EPS (4+4 PIN)	PCIe (6+2 PIN)	PCIe (16 PIN)	SATA	MOLEX (PERIPHERAL)	FDD
1	2	6	1	12	4	1

Power Supply Cable

	<p>600mm</p> 	<p>ATX Cable x1</p>
	<p>700mm</p> 	<p>EPS (8 PIN to 4+4 PIN) Cable x2</p>
	<p>600mm</p> 	<p>PCIe (8 PIN to 6+2 PIN) Cable x2</p>
	<p>600mm</p> 	<p>PCIe (16 PIN to 16 PIN) Cable x1</p>
	<p>600mm</p> 	<p>PCIe (16 PIN to 6+2 PIN) Cable x1</p>
	<p>500mm 3 x 150mm</p> 	<p>SATA Sleeved Cable x3</p>
	<p>500mm 4 x 150mm</p> 	<p>MOLEX/FDD Sleeved Cable x1</p>