

STOVE ANTARES 10

ANTARES

Price:

€1,089.58

EAN:

5901350006115

ANTARES is a modern and ecological freestanding steel stove with an interesting geometrical shape. Its simple semicircular shape and large glazing guarantee a splendid vision of fire, and will catch the attention of each user.



Shipping on pallet

transfer - zł106.00

COD - zł111.00

Implementation within

14 days

Technical Specifications

Rated output (kW)	10,0
Range of heating power (kW)	6.0 - 12.0
Efficiency (%)	81,0
Exhaust outlet diameter (mm)	150
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	Yes
Fuel type	seasoned hardwood (moisture $\leq 20\%$), abgelagertes hartholz (feuchtigkeit $\leq 20\%$), bois dur séché (humidité $\leq 20\%$), madera dura sazonada (humedad $\leq 20\%$), sezonowane drewno liściaste (wilgotność $\leq 20\%$), legno duro stagionato (umidità $\leq 20\%$), legno duro stagionato (umidità $\leq 20\%$), высушенная лиственная древесина (влажность $\leq 20\%$)
CO emission (at 13% O ₂) \leq given in %	0,10

Flue gas temperature (°C)	215,0
Max log length (cm)	30
Emission of dust (mg/Nm ³)	35,0
Compliance with BImSchV 2 standard	Yes
The energy efficiency index EEI	108,50
Glazing type	rounded, gerundet, arrondi, redondeado, półokrągłe, arrotondato, zaoblený, округлый
Opening of the doors	left-hand, links, à gauche, a sinistra, w lewo, a sinistra, levá ruka, левый
Material	steel, stahl, acier, acero, stal, acciaio, ocel, стальной
Height (cm)	150,10
Diameter (cm)	52,20
External air inlet	Yes
The liner of the combustion chamber	Yes
Ashpan	Yes
Decorative printed glass	No

Features

MODERN DESIGN

The spacious glazing makes the vision of fire more attractive. The interior of the stove is lined with innovative material TERMOTEC which perfectly contrasts with the stove, giving it a modern design. TERMOTEC is a ceramic material which accumulates heat and raises the temperature in the furnace.

Solid vertical handle, makes it easy to seal the door. Due to this, the appliance is suitable for the homes with recuperation.

Under the combustion chamber there is an additional, closed chamber, in which the air inlet connection system is hidden. Opening the chamber door is based on an intuitive push to open system that does not require an additional handle.

MAXIMUM USE OF ENERGY

More efficient combustion and longer maintenance of temperature by lining the combustion chamber with ceramic material TERMOTEC which accumulates heat and raises the temperature in the furnace.

Full combustion on the dust thanks to deflector which extend the exhaust path. This process increases the efficiency of burning and guarantees better energy use. It also minimizes the emission of harmful substances to the atmosphere. Additionally a diaphragm installed at the exhaust outlet functions similarly to the deflector, enhances the efficiency of the device.

Primary air is supplied to the insert thanks to the built-in 125 mm external air inlet. Air inlet is located from the bottom of the insert. Insert has a cover plate on the back wall and a hole in its base. Thanks to it the user can choose how to connect the external air kit. Air adjustment is done with a throttle adjustable by one regulator placed below the door. This solution prevents from improper usage.

Whole mechanism works quietly and efficiently.

The insert has been equipped in triple air system of combustion chamber. Primary air which enables setting a fire is supplied under the grate. Secondary air - providing economic and ecological burning is supplied by holes on the back wall.

Additionally, this insert is equipped with Clean Glass System (air curtain), so the air is supplied directly to the glass through a system of channels located on the sides of the fireplace. In this way oxygen is supplied to the upper part of the combustion chamber, where happens post-combustion of gases produced while combustion of wood what at the same time reduces harmful CO emissions to the atmosphere.

SAFETY AT THE HIGHEST LEVEL

The ANTARES front is equipped with heat-resistant ceramics that withstand temperatures up to 660°C. The glass we propose is certified for quality and safety.

The body and front of the insert are resistant to high temperatures due to the use of high-grade steel. They also ensure the stability of the entire structure.

Excellent tightness of the device is ensured thanks to solid welds made in the noble gas shield. Steel elements are laser cut using modern devices and then bent on CNC bending machines.

COMFORTABLE USE

The stove uses a specially profiled bottom plate made of TERMOTEC, thanks to which the combustion chamber is deeper and contains more wood.

The furnace can easily be kept clean thanks to the removable grate and container in which ash is collected.


The glazing stays clean thanks to the clean glass system used in it.

The air curtain separates the glass from the firebox. Thanks to that it does not get dirty

ECOLOGICAL COMBUSTION

The stove meets the criteria of **Ecodesign** and the restrictive **BImSchV 2** norm setting the maximum CO emission.

Technical drawing

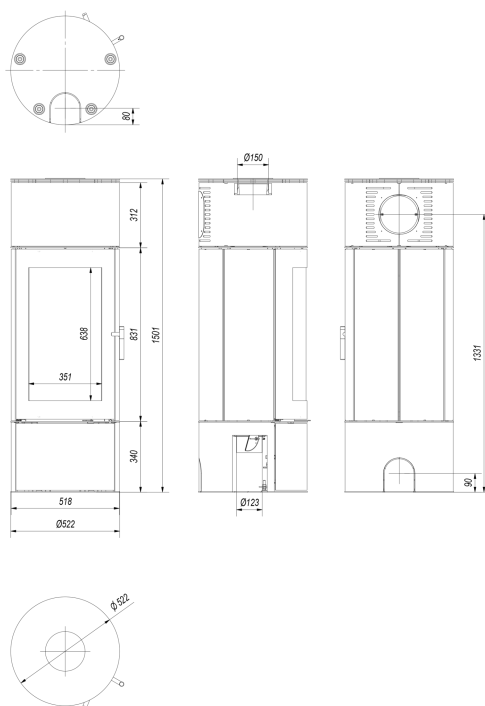


Additional options



Top plate cover for STOVE AB S,
THOR, FALCON, ANTARES

€4.33

Top plate cover for STOVE AB S, STOVE AB S/2,
THOR, THOR/VIEW, FALCON, FALCON/VIEW,
ANTARES is required for back exhaust outlet
installation.



Spring for door shutting MB, LUCY
L/BS, NADIA L/BS, AQUARIO,
STOVE AB S, STOVE AB S/2, ORBIT,
FALCON, ANTARES

€26.02

Spring for door shutting - automatically closes the
door.



Steel pipe 150/0.5m

€17.48

Exhaust pipe designed for connecting wood-fired
fireplace inserts an the existing flue pipes.



Movable elbow 150/90

€24.65

Adjustable elbow up to 90°, 3-segment, diameter: 150 mm.



Steel pipe 150/1m

€24.98

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Damper Ø 150 black

€16.74

The damper is designed to regulate the smoke draft.



Steel rosette Ø 150 CLASIC

€2.83

Rosette Ø 150, made of black sheet - a masking element.

Warranty

All the products available at www.kratki.com are brand new, free from any physical or legal defects. The Producer grants a 5-year warranty from the moment of purchase of a stove for its reliable operation. The ceramic liner is covered with a 2-year warranty from the moment of the purchase of the stove. Grate and sealing for the stove are covered with a 1-year warranty from the moment of the purchase of the stove. The warranty shall not cover heat-resistant ceramics. The application of the stove, the method of joining with the chimney as well as the terms and conditions of use must correspond with the manual.

Return

A Customer being a Consumer, who has concluded the Sales Contract may rescind thereof within a period of 14 days without giving any reasons. The time limits run for the rescission of the Sales Contract shall commence at the time of acquiring the Goods by the Customer or a third party of their choice, other, however, than a carrier. The representations may be submitted in a form whose template has been published by the Seller at the Online Shop Website.



Kratki.pl Marek Bal
ul. W. Gombrowicza 4
26-660 Wsola/Jedlińsk

www.kratki.com
(+48) 48 389 99 11
contact@kratki.com

Date of publication:
09.09.2021