

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LQWELL

**Supplier's address:** Qin Luo, Am Bahndamm 5, 41334 Nettetal, DE

**Model identifier:** 90050

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Connecting leads NMLS		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 200 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	18,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	649	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	17	
	Depth	1	
			See image in last page



parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,403
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	1	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,00	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;

**Attachment 1****Test Result**

Spectrum of sample 1#:

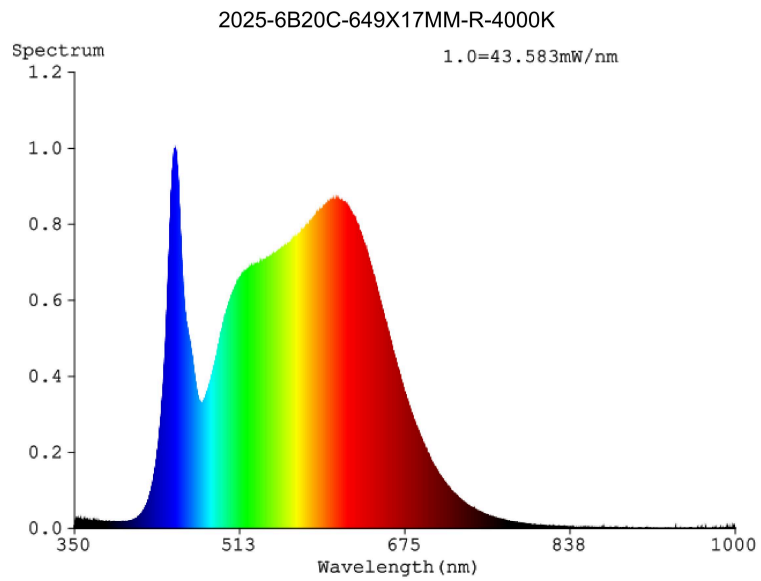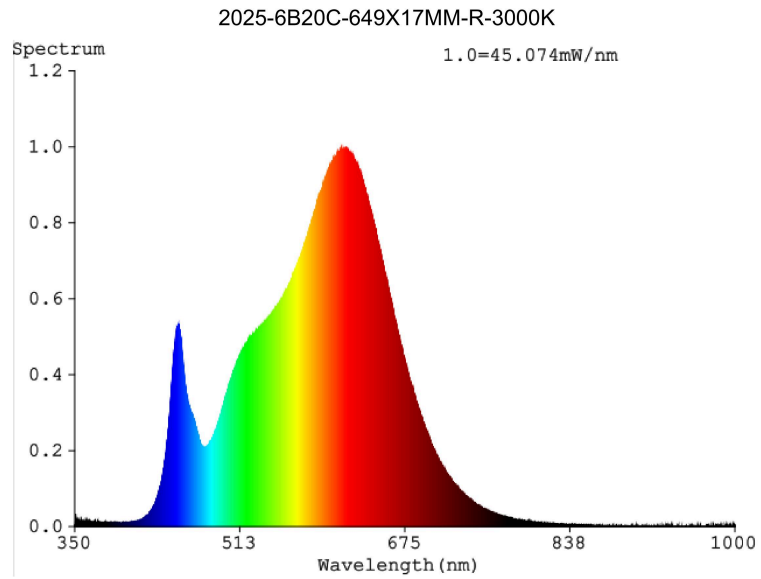


HB-5S-123E-2

Page 25 of 31

**Zhongshan Bontek Compliance Testing Laboratory Co., Ltd.**1-4/F., Annex Building 1, Huayi Tongyi Industrial Park Factory Area, Caosandongxing Road, Guzhen, Zhongshan, Guangdong, China  
<http://www.drlts.cn> Tel: +86 760-22386277 Fax: +86 760-22349648-8012

Model placed on the Union market from 04/12/2023



**EPREL registration number:** 1874607

<https://eprel.ec.europa.eu/qr/1874607>

**Supplier:** Europapa Handels GmbH (Importer)

**Website:** [www.lqwell.de](http://www.lqwell.de)

**Customer care service:**

**Name:** Qin Luo

**Website:** [www.lqwell.de](http://www.lqwell.de)

**Email:** [info@europapa.com](mailto:info@europapa.com)

**Phone:** +4917640219185

**Address:**

Am Bahndamm 5  
41334 Nettetal  
Germany