

Reolink-TrackMix Series P760-Spezifikationen

| | | | |
|--------------------------------|---|--|----------|
| | Modell | Reolink TrackMix Series P760 | |
| Video & Audio | Bildsensor | 1/3" +1/2,8" CMOS-Sensor | |
| | Videoauflösung | Bis zu: 3840 x 2160 (8,0 Megapixels) bei 25 Frames/Sek | |
| | Objektiv | f=2.8mm@F=1.6, f=8mm@F=1.6 | |
| | Videokomprimierung | H.264, H.265 | |
| | Sichtfeld | Horizontal: | 104°-38° |
| | | Vertikal: | 60°-21° |
| | Zoom | 6X Hybridzoom | |
| | Tag-/Nacht-Modus | IR-Cut Filter mit automatischer Umschaltung | |
| | Infrarot-Nachtsicht | Bis zu 30 Meter (LED: 2 Stk./850 nm) | |
| | Farbige Nachtsicht | Spotlight: 2 Stk./6500K/450 Lumen | |
| Audio | Zwei-Wege-Audio | | |
| Strom | PoE | IEEE 802.3af, 48V Active | |
| | DC Strom | DC 12,0V=1A, <12W | |
| Schnittstelle | Strom | DC Stromeingang | |
| | System | Reset-Taste | |
| | Ethernet | 1 x 10M/100Mbps RJ45 | |
| | Speicherung | microSD-Kartenslot (Max. 256GB) | |
| | Audio | Eingebautes Mikrofon & Lautsprecher | |
| Schwenken & Neigen | Schwenk- & Neigewinkel | Schwenk: 355°, Neige: 0°~90° | |
| | Schwenkgeschwindigkeit | 2.5° ~ 90°/ Sek. (einstellbar) | |
| | Neigegeschwindigkeit | 1.5° ~ 60°/ Sek. (einstellbar) | |
| | Preset | 32 | |
| | Auto-Tracking | Unterstützt | |
| Software & Funktion | Bildfrequenz | Mainstream: 2fps - 25fps | |
| | | Substream: 4fps - 20fps | |
| | Bitrate | Mainstream: 4096Kbps - 8192Kbps | |
| | | Substream: 128Kbps - 1228Kbps | |
| | Browser | Edge, Chrome, Firefox, Safari | |
| | Betriebssystem | PC: Windows, Mac OS; Smartphone: iOS, Android | |
| | Smarte Alarme | Bewegungserkennung; Personen-/Fahrzeug-/Haustiererkennung | |
| | Aufzeichnungsmodus | Bewegungsaufzeichnung (Standard); Aufzeichnung nach Zeitplan; 24/7 Aufzeichnung | |
| | Methode der Verfolgung | Digital Tracking; Tracking Priorität: Pan/Tilt; Tracking Priorität: Digital | |
| | Protokoll & Standard | HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P | |
| Max. Benutzerzugriff | 20 Benutzer (1 Administrator-Konto & 19 Benutzerkonten); Unterstützt bis zu 12 simultane Videostreams (10 x Substream & 2 x Mainstream) | | |
| Smart Home | Google Assistant | | |
| Arbeitsumgebung | Temperatur | Arbeitstemperatur: -10°C - +55°C (14°F - 131°F) | |
| | Feuchtigkeit | Arbeitsfeuchtigkeit: 10% - 90% | |
| | Wetterbeständigkeit | IP65 | |
| Größe & Gewicht | Größe | 228 x 147 x 110mm | |
| | Gewicht | 1,21kg | |
| Garantie | Eingeschränkte Garantie | 2-Jahre eingeschränkte Garantie. Für Support gehen Sie zur https://support.reolink.com/hc/en-us/ | |

Trackmix Series P760

Smart 4K Dual-Lens PTZ Camera with Auto-Zoom Tracking



Auto-Zoom Tracking

Pan/tilt to track and zoom in on a moving target automatically.

4K

4K UHD

Delivers sharper images and videos with the finest details.



Dual-Lens

Wide-angle & telephoto lenses for full-view and close-up images.



Dual View Display

See both a full view and a clear closeup on one screen.



Smart Detection

Distinguish people, vehicles, and animals from other objects.



Color Night Vision

Provides full-color nighttime recordings with its spotlights on.



Power over Ethernet

Transmit data and power with only one Ethernet cable.




Two-Way Audio

Talk to anyone in front of the camera in real time.



Weatherproof

Performs well even in harsh weather conditions.

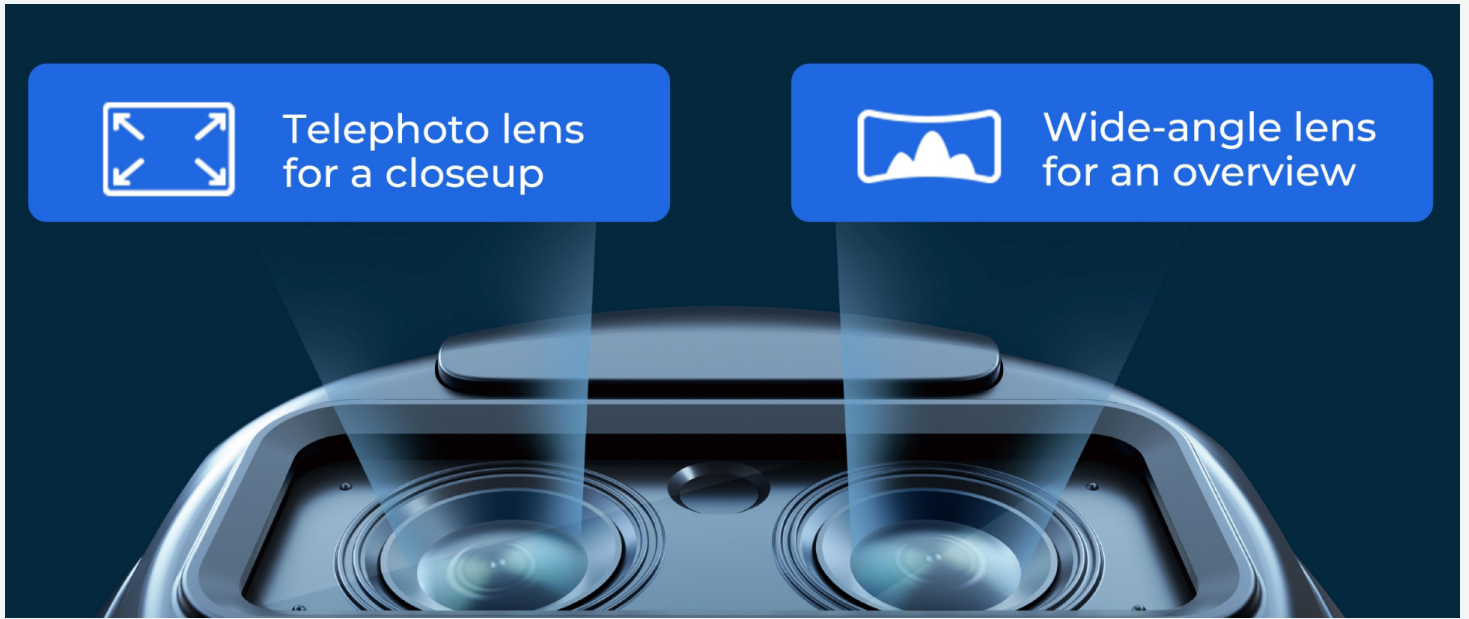

Dual View on One Screen

The dual-lens camera brings you a broad overview and a clear closeup simultaneously and shows them on one screen.




Auto-Track & Auto-Focus

Pans 355° and tilts 90° to automatically follow and zoom in on the moving object, clearly showing you how the event unfolds.



Impressive Clarity in 4K 8MP

Get razor-sharp recordings in 4K clarity. Stay better informed with the hard-to-see details captured by the camera.

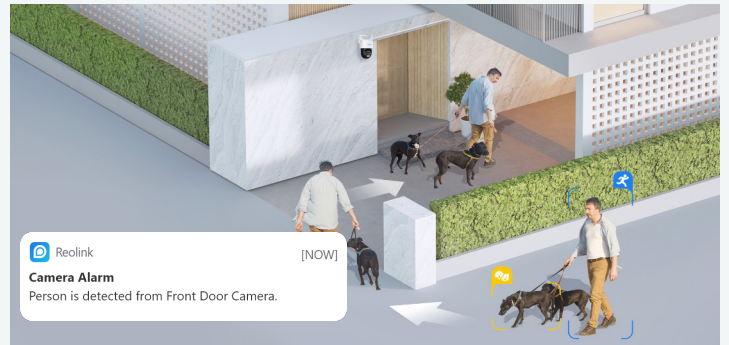

Only the Alerts You Want

Get alerts just for things you care about, like people, vehicles, and animals. No more useless notifications.



Flexible Storage Options

Save your recordings to a microSD card of up to 256 GB, Reolink NVR, or FTP server. Choose a way you like and enjoy customized security.

Gallery



One App/Client for All Control

Stay connected to your home or business anytime, anywhere.



Privacy in Your Hands

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.



| | | |
|----------------------------|-----------------------|---|
| Model | Trackmix Series P760 | |
| Video & Audio | Image Sensor | 1/3"+1/2.8"CMOS Sensor |
| | Video Resolution | Up to: 3840 x 2160 (8.0 megapixels) at 25 frames/sec |
| | Lens | f=2.8mm@F=1.6,f=8mm@F=1.6 |
| | Video Format | H.264, H.265 |
| | Field of View | Horizontal: 104°-38° Vertical: 60°-21° |
| | Zoom Mode | 6X hybrid zoom |
| | Day & Night | IR-cut filter with auto-switching |
| | Infrared Night Vision | Up to 30 meters (100ft) (LED: 2pcs/850nm) |
| | Color Night Vision | Spotlights: 2pcs/6500K/450 lumens |
| | Audio | Two-way audio |
| Power | PoE | IEEE 802.3af, 48V active |
| | DC Power | DC 12.0V-2A, <12W |
| Interface | Power | DC power port |
| | System | Reset button |
| | Ethernet | One 10M/100Mbps RJ45 |
| | Storage | microSD card slot (Max. 256GB) |
| | Audio | Built-in microphone and speaker |
| Pan&Tilt | Pan &Tilt Range | Pan: 355°; Tilt: 0°~90° |
| | Pan Speed | 2.5°-90°/s (Speed can be set) |
| | Tilt Speed | 1.5°-60°/s (Speed can be set) |
| | Preset | 32 |
| | Auto Tracking | Support |
| Software Features | Frame Rate | Mainstream: 2fps - 25fps Substream: 4fps - 20fps |
| | Code Rate | Mainstream: 4096Kbps -8192Kbps Substream: 128Kbps -1228Kbps |
| | Browsers Supported | Edge, Chrome, Firefox, Safari |
| | OS Supported | PC: Windows, Mac OS; Smartphone: iOS, Android |
| | Smart Alarm | Motion detection; person detection; vehicle detection; animal detection |
| | Recording Modes | Motion/scheduled recording (default: motion recording) |
| | Tracking Method | Digital Tracking; Pan/Tilt Tracking First; Digital Tracking First |
| | Protocols & Standards | HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS,DDNS, FTP, P2P |
| | Maximal User Access | Supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams) 20 users (1 admin account & 19 user accounts); |
| | Work with | Google Assistant |
| Working Environment | Temperature | Operating temperature: -10°C~+55°C (14°F~131°F) |
| | Humidity | Operating humidity: 10% ~ 90% |
| | Waterproof | Support |
| Size & Weight | Dimension | 228*147*110mm |
| | Weight | 1.21KG |
| WarrantyWarranty | Limited Warranty | 2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ . |



- 1 Infrared LED
- 2 Lens
- 3 Mic
- 4 Daylight Sensor
- 5 Spotlight



- 1 microSD Card Slot
- 2 Reset Button

Best Companion



microSD Card



RLA-PS1
(PoE Switch)



Reolink NVR



PoE Injector



Ethernet Cable



Waterproof Lid



Power Extension Cable



Power Adapter

Download Free Reolink App & Client

Learn more: <https://reolink.com/software-and-manual/>



Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>