

PT-VMZ71 Series LCD Projectors

AVAILABLE FROM FEBRUARY 2022*


* Availability varies by country or region.

Lightest-in-Class*¹ PT-VMZ71 Series LCD Projector Delivers Up to 7,000 lm² for Clear, Vivid Images in Well-Lit Classrooms and Offices

*¹ According to Panasonic research for the PT-VMZ71 only among LCD laser projectors in the 7,000-lumens-class or higher as of November 2021.



White Models

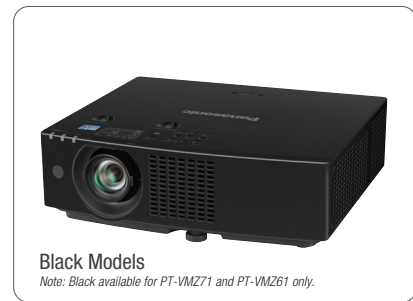

Black Models

Note: Black available for PT-VMZ71 and PT-VMZ61 only.



* Optional AJ-WM50 Series Wireless Module required.



PT-VMZ71 Series							
	PT-VMZ71	PT-VMZ61	PT-VMZ51	PT-VMZ51S	PT-VMZ41	PT-VMW61	PT-VMW51
Light Output	7,000 lm ²	6,200 lm ²	5,200 lm ²		4,500 lm ²	6,200 lm ²	5,200 lm ²
Resolution	WUXGA				WXGA		

Note: Availability varies by country or region.

• Clear Images That Are Easy to See in Bright Rooms

Thanks to its refined optical design, PT-VMZ71 Series is the lightest LCD laser projector in its class*¹ with up to 7,000 lm² from a compact 7.2 kg*² (15.87 lbs) body. Outstanding image visibility in open spaces, classrooms, and offices is enhanced by 3,000,000:1*⁴ contrast, vivid color reproduction, and Daylight View Basic, even with the lights on.

• Installation Flexibility Adapts Projection to Any Space

PT-VMZ71 Series features 1.6x optical zoom, V/H Lens-Shift, V/H/Corner Keystone Correction, and new 6-Point Screen Correction that enables distortion-free projection into corners. HDMI®-CEC command and 4K input-signal*⁵ support make integration easy. Combination of Digital Zoom Extender*⁶ and optical zoom reduces need to reposition when replacing a ceiling-mounted projector.

• Enjoy Smooth and Effortless Collaboration

Optional wireless function*⁷ supports QR Code*⁷ connection to Wireless LAN, allowing groups to quickly share documents, photos, and video to the big screen via software*⁸ and apps*⁹. Optional Wireless Presentation System PressIT*¹⁰ enables content display from almost any device at the press of a button. You can also project media from a USB flash-drive without cable hassle.

Note: Pursuant to the Panasonic Group's transition to a holding company system, Panasonic Corporation, Connected Solutions Company will change its name to Panasonic Connect Co., Ltd. in April 2022.

*¹ According to Panasonic research for the PT-VMZ71 only among LCD laser projectors in the 7,000-lumens-class or higher as of November 2021. *² PT-VMZ71 only. For individual model specification, please refer to the specifications table. *³ Specification is tentative. Measurement, measuring conditions, and method of notation all comply with ISO/IEC 21118: 2020 international standards. Value is average of all products when shipped. When [PICTURE MODE] is set to [DYNAMIC] and [LIGHT POWER] is set to [NORMAL]. *⁴ Full On/Full Off, when [PICTURE MODE] is set to [DYNAMIC] and [DYNAMIC CONTRAST] is set to [1]. Measurement, measuring conditions, and method of notation all comply with ISO/IEC 21118: 2020 international standards. Value is average of all products when shipped. *⁵ Input signals are converted to the projector's display resolution upon playback. 4K/30p signals are supported via HDMI and DIGITAL LINK terminals (DIGITAL LINK not included on PT-VMZ51S and PT-VMZ41 models). *⁶ Resolution may decrease when using Digital Zoom Extender. 6-Point Screen Correction, V/H Keystone Correction, and curved-screen correction are not available when using this function, and range of corner adjustment is limited. *⁷ With optional AJ-WM50 Series Wireless Module (sold separately). Availability may vary by country or region. *⁸ Available free for Windows® PC only from the Panasonic projector website. *⁹ Check device and OS compatibility at the App Store or the Google Play Store. *¹⁰ Availability may vary by country or region. For more information on Wireless Presentation System PressIT, please visit the PressIT webpage.

Specifications (Tentative)

Model	PT-VMZ71	PT-VMZ61	PT-VMZ51	PT-VMZ51S	PT-VMZ41	PT-VMW61	PT-VMW51	
Projector type	LCD projectors							
LCD panel	Size	16.3 mm (0.64 in) diagonal (16:10 aspect ratio)						
	Display system	Transparent LCD panel (x 3, R/G/B)						
	Drive method	Active matrix						
	Pixels	2,304,000 (1920 x 1200) pixels				1,024,000 (1280 x 800) pixels		
Light source	Laser diode							
Light output*1*2	7,000 lm	6,200 lm	5,200 lm		4,500 lm	6,200 lm	5,200 lm	
Time until light output declines to 50 %*3	20,000 hours (NORMAL/QUIET)/24,000 hours (ECO)							
Resolution	WUXGA (1920 x 1200 pixels)					WXGA (1280 x 800 pixels)		
Contrast ratio*4	3,000,000:1 (Full On/Full Off) (When [PICTURE MODE] is set to [DYNAMIC] and [DYNAMIC CONTRAST] is set to [1].)							
Screen size (diagonal)	0.76–7.62 m (30–300 in), 16:10 aspect ratio							
Center-to-corner zone ratio*1	85 %							
Lens	1.6x manual zoom (throw ratio: 1.09–1.77:1), manual focus lens, F 1.60–2.12, f 15.30–24.64 mm							
	Lens shift (from center of screen)	Vertical	+44 %, 0 % (manual)				Horizontal	+20 %, -20 % (manual)
Keystone correction range	Vertical: ±25 °, Horizontal: ±35 °					Vertical: ±35 °, Horizontal: ±35 °		
Installation	Ceiling/floor, front/rear, free 360-degree installation							
Terminals	HDMI IN	HDMI 19-pin x 2 (Compatible with HDCP, Deep Color, 4K/30p** signal input), CEC supported						
	COMPUTER 1 IN	D-sub 15-pin (female) x 1 (RGB/YPbPr/YCbCr)						
	COMPUTER 2 IN	D-sub 15-pin (female) x 1 (RGB/YPbPr/YCbCr)						
	AUDIO 1/2 IN	M3 stereo mini-jack x 2						
	VARIABLE AUDIO OUT	M3 stereo mini-jack x 1						
	SERIAL IN	D-sub 9-pin (female) x 1 for computer control (RS-232C compliant)						
	DIGITAL LINK/LAN	RJ-45 x 1 for network and DIGITAL LINK connection (video/network/serial control) (HDBaseT™ compliant), 100Base-TX (Compatible with PjLink™ [Class 2], HDCP, Deep Color, 4K/30p** signal input)				RJ-45 x 1 for network and DIGITAL LINK connection (video/network/serial control) (HDBaseT™ compliant), 100Base-TX (Compatible with PjLink™ [Class 2], HDCP, Deep Color, 4K/30p** signal input)		
	LAN	RJ-45 x 1 for network control, 10Base-T, 100Base-TX, compatible with PjLink™ [Class 2]						
	USB (VIEWER/WIRELESS/DC OUT)	USB connector (Type A) x 1 for Memory Viewer function, optional Wireless Module AJ-WM50 Series, power supply (DC 5 V, maximum 2 A**)						
	Power supply	AC 100 V–240 V, 50/60 Hz						
Power consumption (TBD)	420 W	370 W	320 W	315 W		370 W	320 W	
Built-in speaker	10 W monaural							
Cabinet materials	Molded plastic							
Filter*6	Included (Estimated maintenance time: approx. 20,000 hours)							
Operation noise*1	39 dB (NORMAL/ECO), 29 dB (QUIET)			37 dB (NORMAL/ECO), 27dB (QUIET)		39 dB (NORMAL/ECO), 29 dB (QUIET)		37 dB (NORMAL/ECO), 27dB (QUIET)
Dimensions (W x H x D)	399 mm x 115 mm x 348 mm (15 23/32" x 4 17/32" x 13 11/16") (not including protruding parts)							
	399 mm x 133 mm x 348 mm (15 23/32" x 5 1/4" x 13 11/16") (with feet at shortest position)							
Weight with supplied lens*7	Approx. 7.2 kg (15.87 lbs)	Approx. 6.9 kg (15.21 lbs)	Approx. 6.5 kg (14.33 lbs)		Approx. 6.9 kg (15.21 lbs)	Approx. 6.5 kg (14.33 lbs)		
Operating environment	Operating temperature: 0–45 °C (32–113 °F)**8-9, Operating humidity: 20–80 % (no condensation)							
Applicable software	Multi Monitoring & Control Software, Logo Transfer Software, Presenter Light Software for Windows®**10, Wireless Projector App for iOS/Android™**11							

Note: Availability varies by country or region.

*1 Measurement, measuring conditions, and method of notation all comply with ISO/IEC 21118: 2020 international standards. Value is average of all products when shipped. *2 When [PICTURE MODE] is set to [DYNAMIC], [LIGHT POWER] is set to [NORMAL], [DAYLIGHT VIEW] is set to [OFF], and [AUTO POWER SAVE] is set to [OFF]. *3 Around this time, light output will have decreased to approximately 50 % of its original level ([PICTURE MODE]: [DYNAMIC], [DYNAMIC CONTRAST] set to [2], temperature 30 °C (86 °F), elevation 700 m (2,297 ft) with 0.15 mg/m³ of particulate matter). Estimated time until light output declines to 50 % varies depending on environment. *4 4K signals are converted to the projector's resolution upon projection. *5 On standby, power supply is available with Quick Startup set to ON or Power Management set to Ready. *6 Filter cleaning cycle varies depending on environment. Filter can be washed and reused up to two times. Filter cleaning cycle: 20,000 hours (under dust conditions of 0.08 mg/m³), 10,000 hours (under dust conditions of 0.15 mg/m³). *7 Average value. May differ depending on the actual unit. *8 Light output is limited at operating temperatures higher than 30 °C (86 °F), and projectors cannot be operated at altitudes higher than 2,700 m (8,858 ft) above sea level. *9 When optional AJ-WM50 Series wireless module is attached, operating temperature range becomes 0–40 °C (32–104 °F). *10 When using Presenter Light Software, images are projected with 1280 x 800 dots or 1024 x 768 dots onto the screen. Also, your PC display resolution may be forcibly changed, and audio playback disrupted or become noisy, while images and sound are being transmitted. *11 When using the Wireless Projector app, display resolution differs depending on your iOS/Android™ device and the display device. The maximum supported display resolution is WXGA (1280 x 800).

Optional Accessories

- Ceiling Mount Bracket**
 ET-PKL100H (for high ceilings) / ET-PKL100S (for low ceilings)
 Note: PKL100H/PKL100S used in combination with ET-PKV400B (sold separately).
- Projector Mount Bracket**
 ET-PKV400B
- Replacement Filter Unit**
 ET-RFV500
- DIGITAL LINK Switcher**
 ET-YFB200G
 Note: ET-YFB200G is not compatible with 4K signals. Not available for PT-VMZ51S or PT-VMZ41.
- Digital Interface Box**
 ET-YFB100G
 Note: ET-YFB100G is not compatible with 4K signals. Not available for PT-VMZ51S or PT-VMZ41.
- Wireless Module**
 AJ-WM50 Series
 Note: product availability may vary by country or region. The suffix at the end of the model number is omitted. Operating Temperature: 0–40 °C (32–104 °F).
- Wireless Presentation System PressIT**
 TY-WPS1 (basic set)
 Note: visit panasonic.net/cns/prodisplays/pressit for more information.
- Early Warning Software**
 ET-SWA100 Series
 Note: part number suffix may differ depending on the license type.

Panasonic®

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Availability of products and accessories may vary by country or region. Products may be subject to export control regulations. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. Trademark PjLink is a trademark applied for trademark rights in Japan, the United States of America and other countries and areas. Android is a trademark or registered trademark of Google LLC. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. Windows® is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. SOLID SHINE and PressIT are trademarks of Panasonic Corporation. All other trademarks are the property of the respective trademark owners. © 2021 Panasonic Corporation. All rights reserved.



For more information about Panasonic projectors, please visit:
 Projector Global Website – <https://panasonic.net/cns/projector/>
 Facebook – www.facebook.com/panasonicprojectoranddisplay
 YouTube – www.youtube.com/user/PanasonicProjector

All information included here is valid as of November 2021.

PT-VMZ71PRE1 Printed in Japan.