

PRODUCT DATASHEET

SMART+ BT TIBEA Pendant Tunable White

TIBEA E27 Tunable White | Indoor luminaire including LED lamp for indirect lighting with Bluetooth technology



Areas of application

- General illumination
- Residential interiors
- Professional (hotels, bars, boutiques etc.)

Product benefits

- Stylish and modern design
- Indirect lighting for a relaxing atmosphere
- Wireless control via app or voice control
- Easy to install and use
- Contains no mercury

Product features

- Controllable via LEDVANCE SMART+ App (with minimum Android 6.0 or iOS 11.0)
- Adjustable color temperature via Tunable White: 2,000...6,500 K
- Dimmable
- As ceiling, pendant and mini type-version available
- Network protocol: Bluetooth
- Lifetime: up to 20,000 h
- For full functionality with control via Apple Home App connection to Apple TV (with tvOS 10 or later) or iPad (with iOS 10 or later) required



TECHNICAL DATA

Electrical data


Nominal wattage	22.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	≥ 0.90
Protection class	II
Operating mode	Integrated LED driver

Photometrical data


Luminous flux	1250 lm
Luminous efficacy	57 lm/W
Color temperature	2700...6500 K
Light color (designation)	Tunable White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 6 sdc

Dimensions & Weight

Diameter	350.00 mm
Height	69.00 mm
Product weight	960.00 g

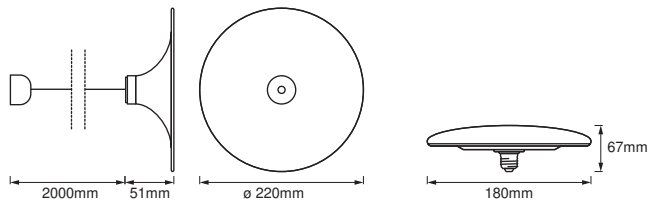

Product line drawing with numbers

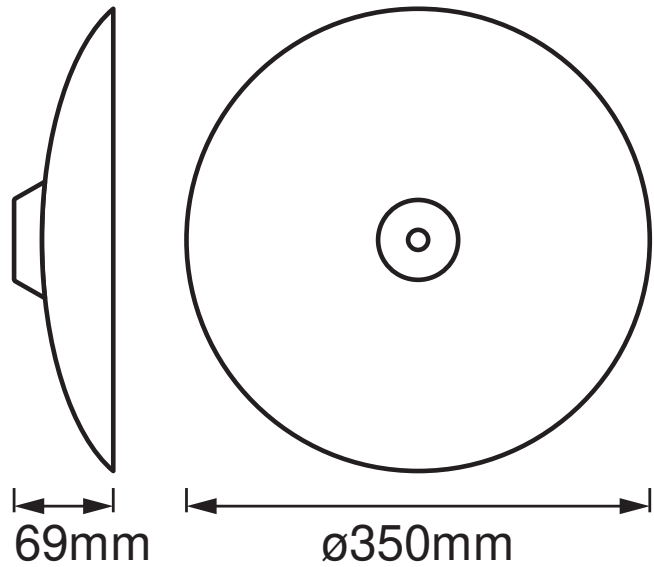

Product line drawing with numbers

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Terminal, 2-Pole (L, N)
Type of protection	IP20
Dimmable	Yes
Mounting type	Suspended
Mounting location	Ceiling
Application environment	Indoor
With light source	Yes
Holder designation	E27

Lifespan

Lifespan L70/B50 at 25 °C	20000 h
---------------------------	---------

Lifespan L80/B10 at 25 °C	20000 h
Lifespan L90/B10 at 25 °C	20000 h
Number of switching cycles	100000





Certificates & Standards

Standards	CE
-----------	----

EQUIPMENT / ACCESSORIES

- For control via LEDVANCE SMART + App Android smartphone (with Android 6.0 and later) required
- For control via Apple Home App iPhone (with iOS 10 or later), iPad (with iOS 10 or later) , Apple TV (with tvOS 10 or later) or Apple Watch (with watchOS 2 or later) required

DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction
	Tender documents
	Declarations of conformity
	Installation guide

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075345423	Folding box 1	109 mm x 465 mm x 361 mm	1408.00 g	18.30 dm ³
4058075345430	Shipping box 2	570 mm x 460 mm x 230 mm	4451.00 g	60.31 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

