

**SPECIFICATION:**



Operating Current (Nom.): 1.5 A  
 Operating Temperature: -40°C to 70°C  
 Insulation Resistance (Min.): 1000 MΩ  
 Contact Resistance (Max.): 20 mΩ  
 Dielectric Strength: 1,000 Vac

**MATERIAL:**

Material (Terminal): phosphor bronze, gold plated  
 Material (Housing): polycarbonate  
 Flammability Class: UL 94 V-2  
 Material (Contact Area): phosphor bronze, gold plated

**HANDLING:**

Packaging: bulk

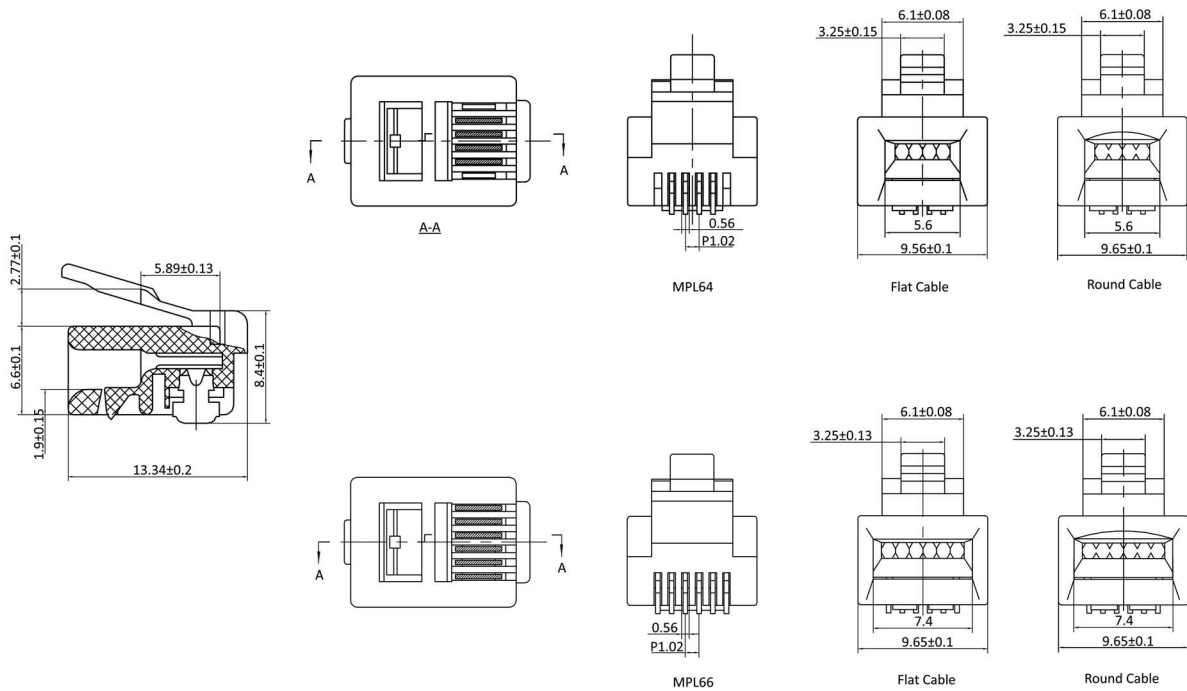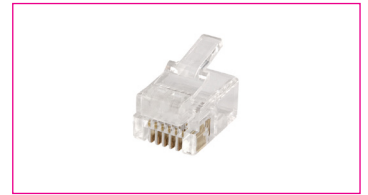

**Order Information**

Identifier:	Conductors:	Version:
<b>MPL6</b>	#	#
Modular plug 6P unshielded	4: 4C 6: 6C	empty: for flat cable R: for round cable