



BAR COVER

CF BAR COVER COVERKIT

The do-it-yourself bar cover kit form



BAR COVER

CF BAR COVER COVERKIT

Easily assemble and transport your bar cover kit according to the dimensions of your pool. The CF bar cover Coverkit has been specially designed for in-ground pools from 7 x 3 m to 9 x 4 m, surrounded by a concrete coping. A real guarantee of safety, as it complies with NF P90-308 (see page 4), it also offers you a host of advantages, in terms of comfort and savings.







+ products

- New **patented** solution.
- Available in kit form, **in stock**.
- Transportable in a light vehicle and **easy to assemble**.
- Ensures pool safety**.



Unique concept

Depending on the width of your pool (3 m or 4 m), select the right starter kit available for a pool length of 7 m. For pools 8 to 9 m long, 1 m extensions are available.

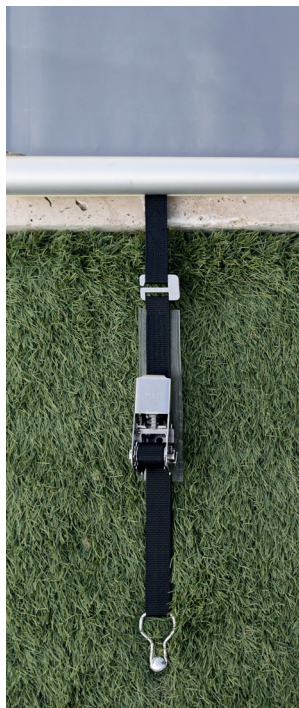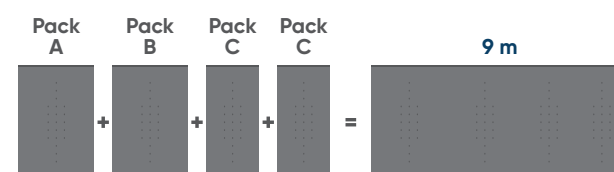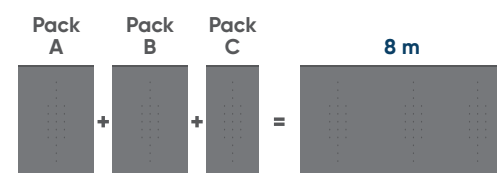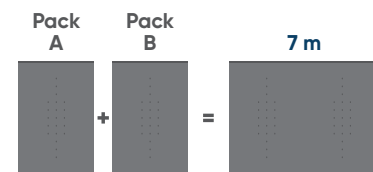

PREMIUM QUALITY COVER

The materials used for the fabric and the fittings are of the highest quality, ensuring that Coverkit cover is extremely hard-wearing.

SAVINGS IN ALL SEASONS

By covering your entire pool with a Coverkit bar cover, you can significantly reduce water evaporation, thus reduce water consumption and the need to heat the pool.

Protected from outdoor debris all year round, your pool requires less maintenance than if you didn't cover it, saving you money on electricity (filtration, robot, etc.) and water treatment products.

SAFETY DEVICE

The Coverkit bar cover complies with the French NF P90-308 standard for the protection of private in-ground pools, so you can enjoy family time with greater peace of mind.

DISCRETION

The cover is gray on top and beige on the underside.



FITTINGS - TENSIONING SIDE


- Patented «Easy» stainless steel ratchet tensioning the cover twice as easily.
- Lateral tension straps in welded hem.
- Anchors for concrete deck (supplied).

FABRIC 580 G/M²

- Ultra-resistant PVC sheet reinforced with polyester mesh.
- Anti-UV and fungicide treatment.
- Finished with welded hem.
- Rainwater drainage holes with flap opening.

FITTINGS - GROUND FIXATION SIDE

- Moveable straps - fixing straps sliding in the bar.
- Anchors for concrete deck (supplied).

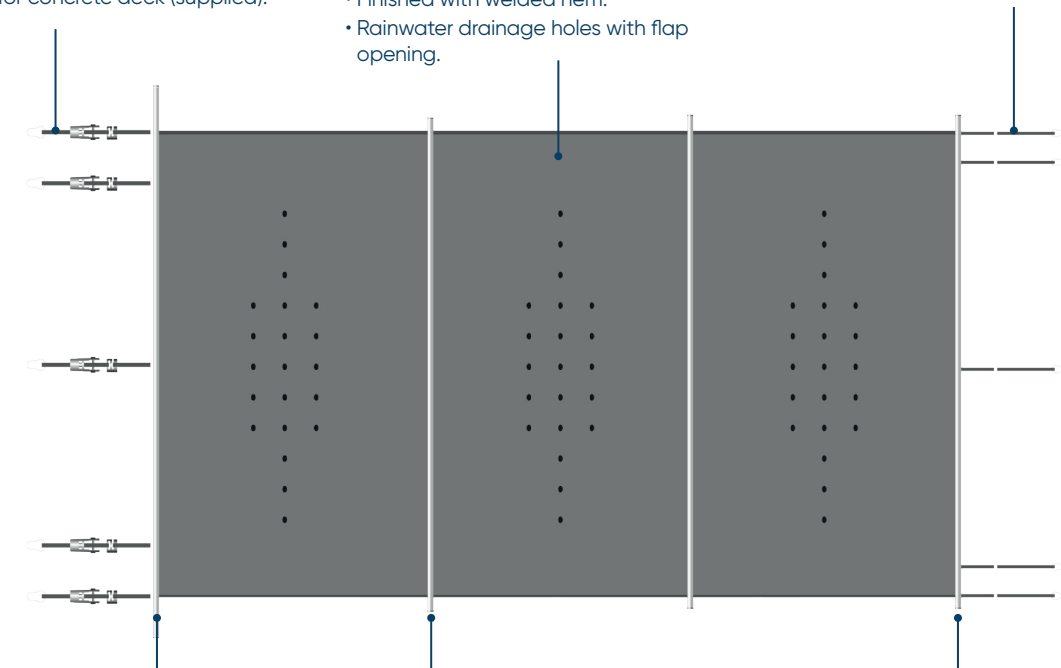

KIT MODULES ASSEMBLY


- Assembling tubes and fabric panels by sliding.

ALUMINUM BAR

- Anodized aluminum bar.
- Finishing plugs.
- Anti-abrasion pads prevent bars from rubbing against concrete coping.

ROLLING / UNROLLING

- Cover supplied with crank handle.
- Roll-e motorized reel system also available (see page 4).

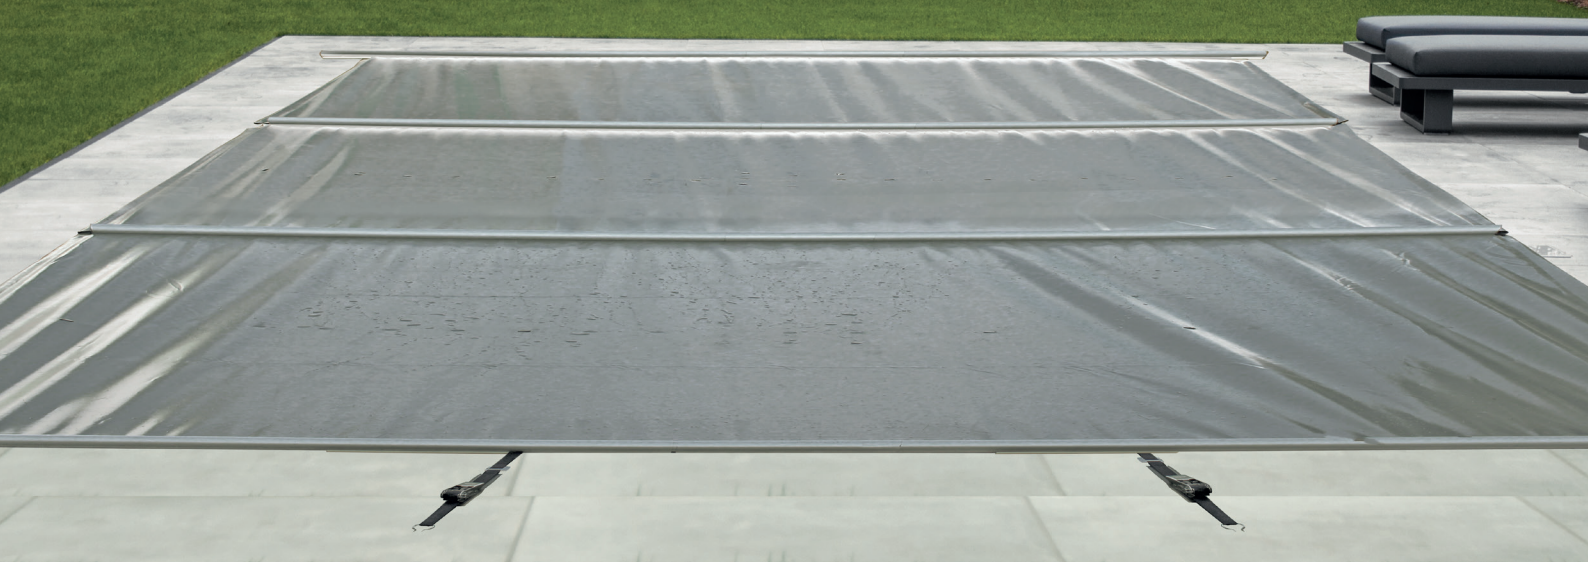

Roll-e

Your motorized reel system, for smooth rolling, with its wired remote control.

The visuals presented in this brochure correspond to presentation installations on concrete slabs covered with synthetic grass.

Please read carefully and retain for future reference.

Product use limitations: CF bar cover Coverkit cannot be used in compliance with NF P90-308 in certain specific cases:

- A basin whose dimensions exceed the following maximum dimensions:
 - Pack 3 m: maximum pool width between coping 3.06 m (minimum width: 2.50 m).
 - Pack 4 m: maximum pool width between coping 4.06 m.
 - Curb-to-curb lengths of 7.02 / 8.02 / 9.02 m maximum, depending on the number of C (0/1/2) extensions.
- If the beach is not made of concrete (e.g. wood, natural soil), at the anchoring points (located 80cm from the edge of the standard pool).
- If the perimeter of the basin is not accessible for safety operations.
- High winds in excess of 70 km/h.

This product is also not suitable for infinity and above-ground pools.

Safety advice to NF P90-308: swimming pool safety cover designed to prevent access to the pool by children under the age of five.

This cover is not a substitute for common sense or personal responsibility. The purpose of this cover is not to replace the vigilance of parents and/or responsible adults, which remains the essential factor for the safety of young children.

Warning!

Be aware that safety is only achieved with a closed, locked and correctly installed cover in compliance with manufacturer instructions.

A child can drown in under 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult.

Care instructions: do not allow leaves to accumulate and decompose on the cover. Regularly clean the cover by removing it from the pool and placing it flat on a suitable surface (beware of plants and sharp objects that could damage the liner). Rinse both sides of the cover under running water and, if necessary, clean the dirtiest areas with a non-abrasive sponge (soak the sponge in water line cleaner if necessary). Do not use abrasives or solvents to clean the cover. Socket hooks and pawls should be cleaned and lubricated regularly to prevent any risk of damage to their operation (foot injuries in the event of impact, falls).

In the event of an accident, and at the start and end of the winter season, check that the cover is in good condition, and replace any damaged parts with original ones. In windy regions, particular attention should be paid to the abrasion of the cover on the coping.

Wintering: position the cover in the closed position and keep the water level constant, in accordance with the manufacturer's recommendations. During the winter season, in the event of snowfall, it is essential to remove snow from the cover using a brush with a telescopic handle, to prevent deformation of the crossbars.

Recommendations for use: the water level should be maintained between 7 and 15 cm from the coping. The cover must rest at least 20 cm on the outside around the entire perimeter of the pool. Period of use: 4 seasons. Opening and closing time is about 3 minutes for one person.

Warranty: the canvas and aluminum bars are guaranteed against defects in material and/or workmanship for a period of 3 years from the date of delivery. Other parts (strap, crank, stainless steel hooks, fixing ring, anti-abrasion pads, end plugs) are guaranteed against material and/or manufacturing defects for a period of 3 years from the date of delivery.

cf-poolproducts.com

FOR MORE INFORMATION, ASK YOUR POOL EXPERT

Manufacturer: Aqualux SAS with a capital of 1 500 000 € - RCS Tarascon B 390 039 949 - ZA La Massane - 13210 Saint-Rémy-de-Provence - FRANCE • Non-binding document • © DEL SAS • 01/24 • Do not throw away • A-DBRO10603.LI



a brand by

