

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Shenzhen Founder Industrial Co., Ltd

Supplier's address: EUREPSTAR GmbH, Unterlettenweg 1a, 85051 Ingolstadt, Germany

Model identifier: FDDL03-R

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes


Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		21	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 500 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power (P_{on}), expressed in W		21,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, lighting control	Height	832	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	720		
	Depth	200		


parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,315 0,331	
Parameters for directional light sources:				
Peak luminous intensity (cd)	850	Beam angle in degrees, or the range of beam angles that can be set	75	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	71	Survival factor	1,00	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,97	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

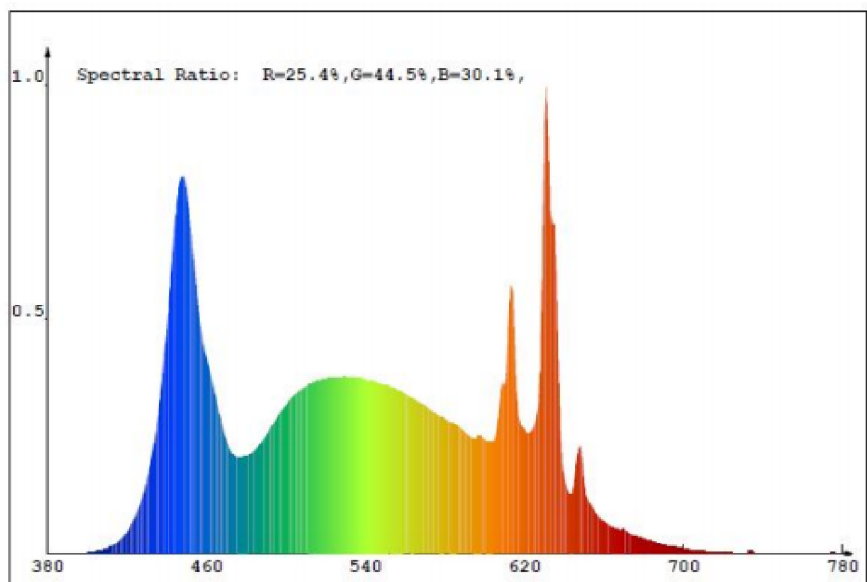

Model placed on the Union market from 24/10/2025.



EPREL registration number: 2509613

<https://eprel.ec.europa.eu/qr/2509613>

Supplier: REP Europe GmbH (Authorised representative)

Website: www.rep-europe.de

Customer care service:

Name: EUREPSTAR GmbH

Website:

Email: eurep@eurep-gmbh.de

Phone: 004984188697744

Address:

Unterlettenweg 1a, 85051 Ingolstadt, Germany