



## USB Type B 2.0, Male Connector Modular


Item No. 2001C202

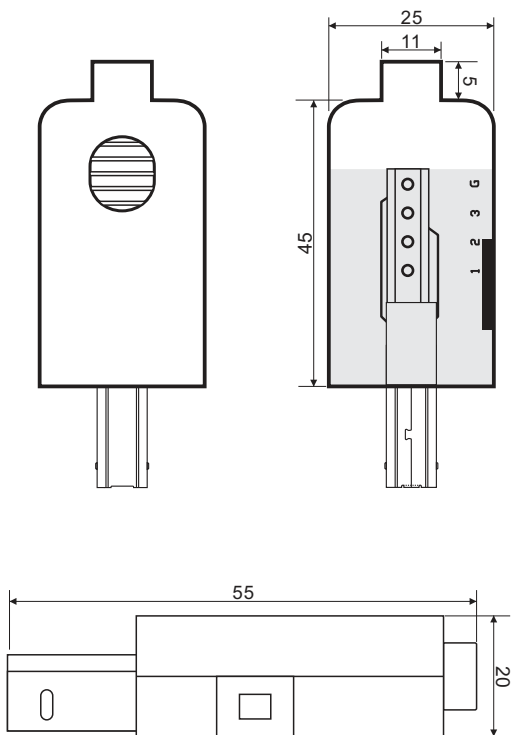

mm±0.2



PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

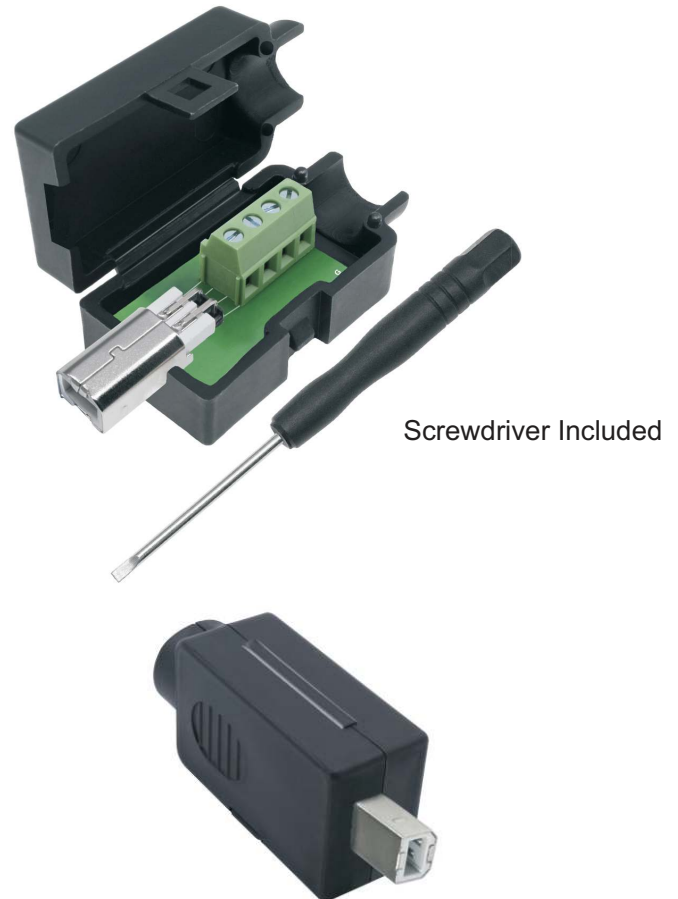

Screwdriver Included

Material:  
Housing: PP  
Insulator: PBT+25%GF  
Connector shell: SPCC with plated Ni 40µ min.  
Contact: Brass with plated Au1µ  
Technical:  
Voltage rating: 5V max.  
Current rating: 2A max.  
Contact resistance: 20mΩ max.  
Insulation resistance: 1000MΩ min.  
Dielectric withstanding voltage: 500V/AC(R.M.S)  
Operation temperature: -20 ~85°C