

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Shenzhen Xincheng Innovation Technology Co., Ltd.

Supplier's address: Shenzhen Xincheng Innovation Technology Co., Ltd., Room2801, Building 1, Evergrande Metropolitan Plaza, No.15 Huancheng South Road, Ma'andang Community, Bantian Street, Longgang District, Shenzhen, China

Model identifier: LP00200

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	/		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tunable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	31	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 158 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	31,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	87
Outer dimensions without separate con-	Height Width Depth	Spectral power distribution in the	See image in last page

trol gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,377 0,369
Parameters for LED and OLED light sources:			
R9 colour rendering index value	9	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor ($\cos \phi_1$)	0,00	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	- ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,0

(a) '-' : not applicable;

(b) '-' : not applicable;

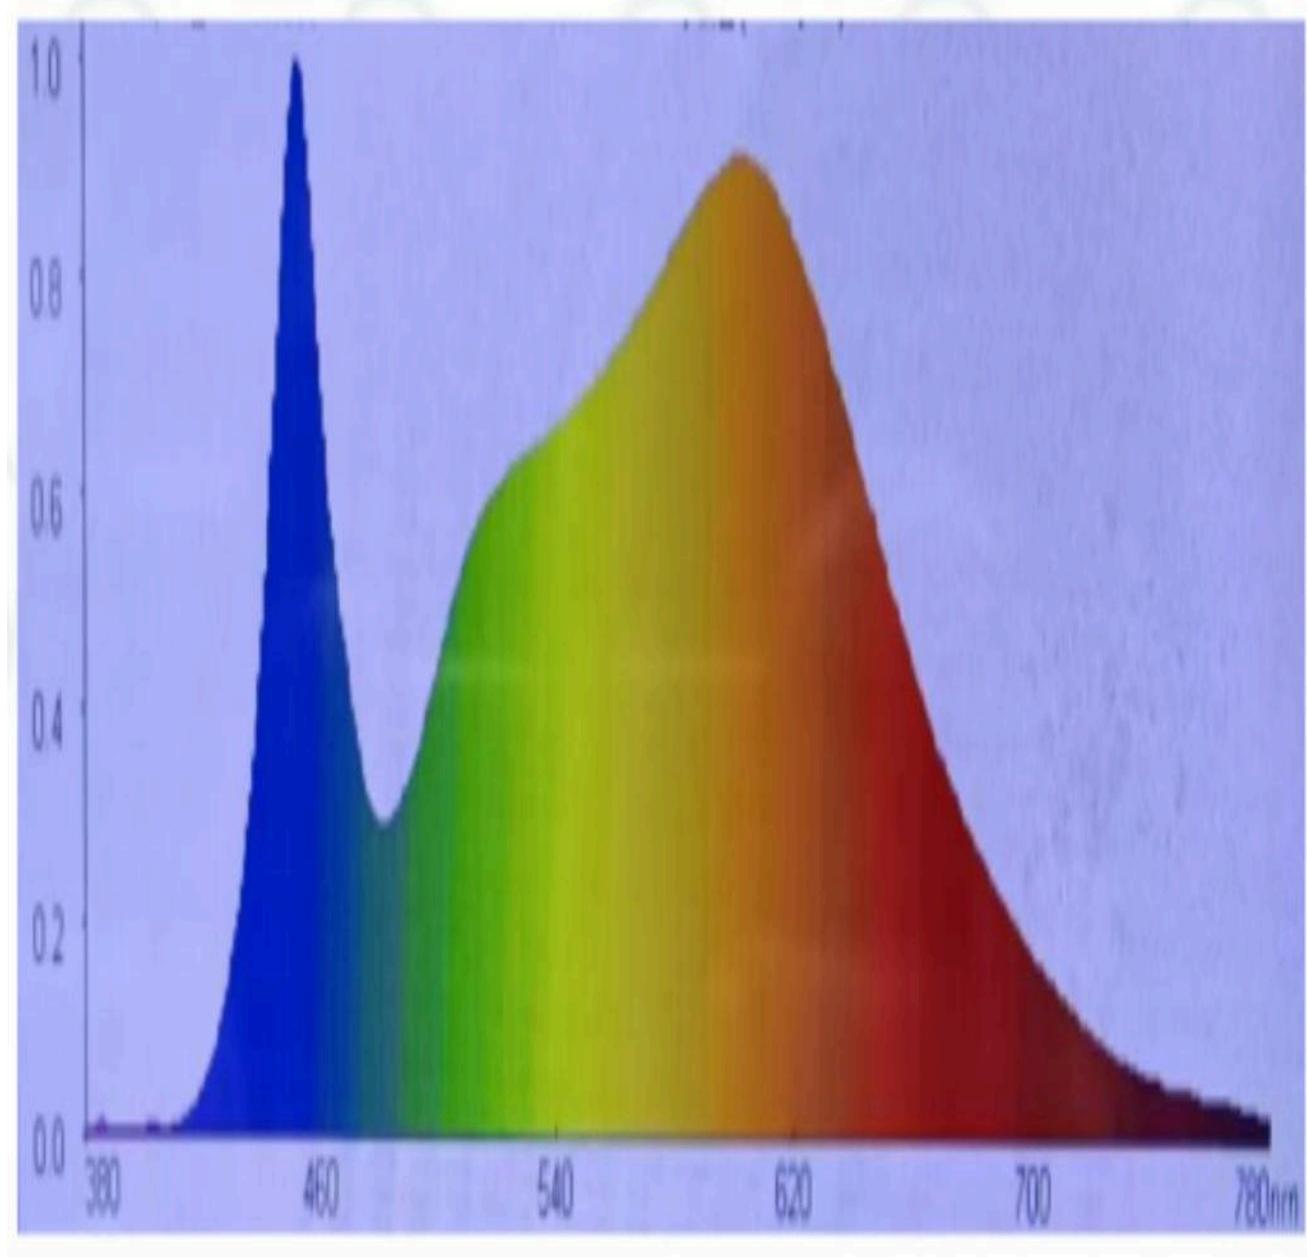

Model placed on the Union market from 14/08/2025



EPREL registration number: 2444989

<https://eprel.ec.europa.eu/qr/2444989>

Supplier: ERP EUROPE LTD (Authorised representative)

Website:

Customer care service:

Name: Shenzhen Xincheng Innovation Technology Co., Ltd.

Website:

Email: oyajia-homecs@outlook.com

Phone: 13530681999

Address:

Room2801, Building 1, Evergrande Metropolitan Plaza, No.15 Huancheng South Road, Ma'andang Community, Bantian Street, Longgang District, Shenzhen, China