

# TEST REPORT

**Applicant:** Dong Guan City Vilsun Electronics Co.,Ltd  
**Address of Applicant:** 3 / F, Building 1, No.172, Jingfu West Road, Yangkeng Village, Dalang Town, Dongguan City, China

## Equipment Under Test (EUT)

**Product Name:** Integrated LED Monitor For PS5  
**Model No.:** GS156PU  
**Trade Mark:** G-STORY

**Applicable standards:** EN 55032:2015+A11:2020  
EN 55035:2017+A11:2020  
EN IEC 61000-3-2:2019  
EN 61000-3-3:2013+A1:2019

**Date of sample receipt:** June 15, 2021

**Date of Test:** June 15- July 28, 2021

**Date of report issued:** July 28, 2021

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Luo**  
**Laboratory Manager**




This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	July 28, 2021	Original

Prepared By:




Date:

July 28, 2021

Project Engineer

Check By:

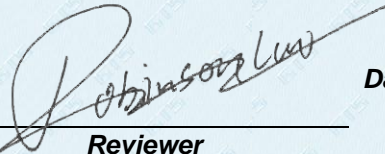

Date:

July 28, 2021

Reviewer

## 3 Contents

1	COVER PAGE.....	1
2	VERSION.....	2
3	CONTENTS.....	3
4	TEST SUMMARY.....	4
5	GENERAL INFORMATION.....	5
5.1	GENERAL DESCRIPTION OF EUT.....	5
5.2	TEST MODE AND TEST VOLTAGE.....	5
5.3	DESCRIPTION OF SUPPORT UNITS.....	5
5.4	MONITORING OF EUT FOR ALL IMMUNITY TEST.....	5
5.5	DEVIATION FROM STANDARDS.....	5
5.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	5
5.7	TEST FACILITY.....	6
5.8	TEST LOCATION.....	6
6	TEST INSTRUMENTS LIST.....	7
7	EMISSION TEST RESULTS.....	10
7.1	RADIATED EMISSION.....	10
7.2	CONDUCTED EMISSION.....	16
7.3	HARMONIC EMISSION.....	19
7.4	FLICKER EMISSION.....	19
8	IMMUNITY TEST RESULTS.....	20
8.1	PERFORMANCE CRITERIA DESCRIPTION IN CLAUSE 7 OF EN 55035.....	20
8.2	ELECTROSTATIC DISCHARGE.....	21
8.3	RADIO-FREQUENCY ELECTROMAGNETIC FIELD AMPLITUDE MODULATED.....	23
8.4	ELECTRICAL FAST TRANSIENTS.....	25
8.5	SURGES.....	27
8.6	RADIO-FREQUENCY CONTINUOUS CONDUCTED.....	29
8.7	VOLTAGE DIPS AND VOLTAGE INTERRUPTIONS.....	30
9	TEST SETUP PHOTO.....	31
10	EUT CONSTRUCTIONAL DETAILS.....	35

## 4 Test Summary

Test item	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (up to 1G)	EN 55032	EN 55032	Class B	Pass
Radiated Emission (Above 1G)	EN 55032	EN 55032	Class B	Pass
Conducted Emission	EN 55032	EN 55032	Class B	Pass
Asymmetric mode conducted emissions	EN 55032	EN 55032	Class B	N/A
Disturbance voltage at antenna terminal	EN 55032	EN 55032	Class B	N/A
Harmonic Emission	EN IEC 61000-3-2	EN IEC 61000-3-2	Class A	N/A
Flicker Emission	EN 61000-3-3	EN 61000-3-3	Clause 5	Pass
Electrostatic discharge	EN 55035	EN 61000-4-2	Contact $\pm 4$ kV Air $\pm 2, \pm 4, \pm 8$ kV	Pass
Radio-frequency electromagnetic field Amplitude modulated	EN 55035	EN 61000-4-3	3V/m 80%, 1kHz, AM	Pass
Electrical fast transients	EN 55035	EN 61000-4-4	$\pm 1.0$ kV for AC port; $\pm 0.5$ kV for signal ports	Pass
Surges	EN 55035	EN 61000-4-5	$\pm 1$ kV D.M, for AC port; $\pm 1$ kV for signal port	Pass
Radio-frequency continuous conducted	EN 55035	EN 61000-4-6	3Vrms (emf), 80%, 1kHz Amp. Mod.	Pass
Voltage dips and Voltage interruptions	EN 55035	EN 61000-4-11	0 % $U_T^*$ for 0.5per 0 % $U_T^*$ for 250per 70 % $U_T^*$ for 25per	Pass

### Remark:

1. Pass: Comply with the essential requirements in the standard.
2. N/A; not applicable
3.  $U_T$ : the nominal supply voltage; D.M: Differential Mode; C.M: Common Mode.
4. # Refer to EN55032 clause 8 conditional testing procedure :

Highest internal frequency ( $F_x$ )	Highest measured frequency
$F_x \leq 108$ MHz	1GHz
108 MHz < $F_x \leq 500$ MHz	2GHz
500 MHz < $F_x \leq 1$ GHz	5GHz
$F_x > 1$ GHz	5 x $F_x$ up to a maximum of 6 GHz

NOTE 1 For FM and TV broadcast receivers,  $F_x$  is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

NOTE 2  $F_x$  is highest fundamental frequency generated or used within the EUT or highest frequency at which it operates.

NOTE 3 For outdoor units of home satellite receiving systems highest measured frequency shall be 18 GHz.

Where  $F_x$  is unknown, the radiated emission measurements shall be performed up to 6 GHz.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Integrated LED Monitor For PS5
Model No.:	GS156PU
Power Supply:	ADAPTER Model: UVE324-1220 Input: AC100-240V, 50/60Hz, 0.6A Output: DC 12V, 2A

### 5.2 Test mode and Test voltage

Test mode:	
Operation mode	Keep the EUT in the operation status.
<b>Test voltage:</b>	
	AC 230V/50Hz

### 5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook PC	X220	N/A

### 5.4 Monitoring of EUT for All Immunity Test

Visual:	Monitor the LCD-display of the EUT.
Audio:	N/A

### 5.5 Deviation from Standards

None.
-------

### 5.6 Abnormalities from Standard Conditions

None.
-------

## 5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

## 5.8 Test Location

RS & Surge (Signal ports and Telecommunication ports) tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Address: No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

All other test items were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480; Fax: 0755-27798960

## 6 Test Instruments List

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 24 2021	June. 23 2022
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 24 2021	June. 23 2022
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 24 2021	June. 23 2022
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 24 2021	June. 23 2022
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 24 2021	June. 23 2022
9	Coaxial Cable	GTS	N/A	GTS211	June. 24 2021	June. 23 2022
10	Coaxial cable	GTS	N/A	GTS210	June. 24 2021	June. 23 2022
11	Coaxial Cable	GTS	N/A	GTS212	June. 24 2021	June. 23 2022
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 24 2021	June. 23 2022
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 24 2021	June. 23 2022
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 24 2021	June. 23 2022
15	Band filter	Amindeon	82346	GTS219	June. 24 2021	June. 23 2022
16	Power Meter	Anritsu	ML2495A	GTS540	June. 24 2021	June. 23 2022
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 24 2021	June. 23 2022
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 24 2021	June. 23 2022
19	Splitter	Agilent	11636B	GTS237	June. 24 2021	June. 23 2022
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 24 2021	June. 23 2022
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 24 2021	June. 23 2022

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 24 2021	June. 23 2022
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 24 2021	June. 23 2022
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 24 2021	June. 23 2022
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 24 2021	June. 23 2022
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 24 2021	June. 23 2022
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	July. 09 2021	July. 08 2022

ESD						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	ESD Simulator	KIKUSUI	KES4021A	GTS242	June. 24 2021	June. 23 2022
2	Thermo meter	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022

Conducted Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Signal Generator	ROHDE & SCHWARZ	SMB 100A	GTS553	June. 24 2021	June. 23 2022
2	CDN	LionCEL	CDN-M3-16	GTS554	June. 24 2021	June. 23 2022
3	CDN	CYBERTEK	EM 5070	GTS559	June. 24 2021	June. 23 2022
4	Power amplifier	rflight	NTWPA-00010475	GTS555	June. 24 2021	June. 23 2022
5	ATT	SUNWAVE	SJ-50-06DB	GTS556	June. 24 2021	June. 23 2022
6	Clamp	SCHAFFNER	KEMZ 801	GTS558	June. 24 2021	June. 23 2022

Harmonic/ Flicker						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Power Analyzer H/F	EMTEST	DPA500	GTS235	June. 24 2021	June. 23 2022
2	AC POWER SUPPLY	EMTEST	ACS500	GTS236	June. 24 2021	June. 23 2022
3	Thermo meter	KTJ	TA328	GTS256	June. 24 2021	June. 23 2022

<b>EFT, Surge, Voltage dips and Interruption</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMTEST system	EMTEST	UCS500N	GTS239	June. 24 2021	June. 23 2022
2	Clamp	EMTEST	HFK	GTS557	June. 24 2021	June. 23 2022
3	Thermo meter	KTJ	TA328	GTS238	June. 24 2021	June. 23 2022



<b>Surge (Signal ports and Telecommunication ports)</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Ultra Compact Simulator	EM Test	UCS 500N7	SEM018-02	2021-04-10	2022-04-09
2	High Speed Coupling/Decoupling Network	EM Test	CNI 508N2	SEM018-05	2021-04-10	2022-04-09
3	Measurement Software	EM Test	IEC CONTROL V6.0.1	N/A	N/A	N/A

<b>Radiated Immunity</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Fully-Anechoic Chamber 2	Chang Zhou Zhong Shuo	854	SEM001-05	2020-05-09	2023-05-08
2	Power Sensor	Rohde & Schwarz	NRP-Z91	SEM009-09	2021-03-31	2022-03-30
3	Stacked Log.-Per.- Broadband Antenna (70MHz-10GHz)	Schwarzbeck	STLP 9129	SEM003-25	N/A	N/A
4	Signal Generator (9kHz-6GHz)	Rohde & Schwarz	SMB100A	SEM006-11	2021-03-31	2022-03-30
5	Broadband Amplifier (80MHz-1GHz)	Rohde & Schwarz	BBA150-BC250	SEM005-12	2020-09-23	2021-09-22
6	Broadband Amplifier(800MHz-3GHz)	Rohde & Schwarz	BBA150-D110	SEM005-13	2021-03-31	2022-03-30
7	Broadband Amplifier(2.5GHz-6GHz)	Rohde & Schwarz	BBA150-E60	SEM005-16	2021-04-10	2022-04-09
8	Measurement Software	Rohde & Schwarz	EMC32 V9.25.00	N/A	N/A	N/A

<b>General used equipment:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022
2	Barometer	ChangChun	DYM3	GTS255	June. 24 2021	June. 23 2022

## 7 Emission Test Results

### 7.1 Radiated Emission

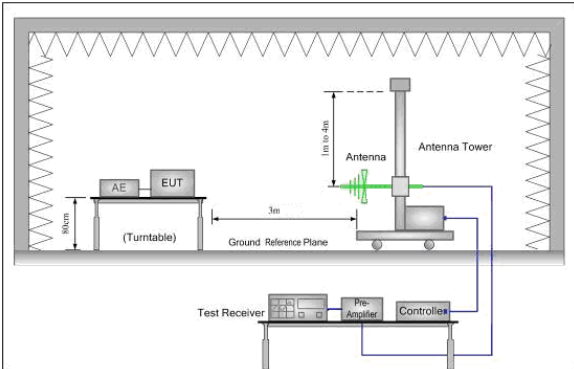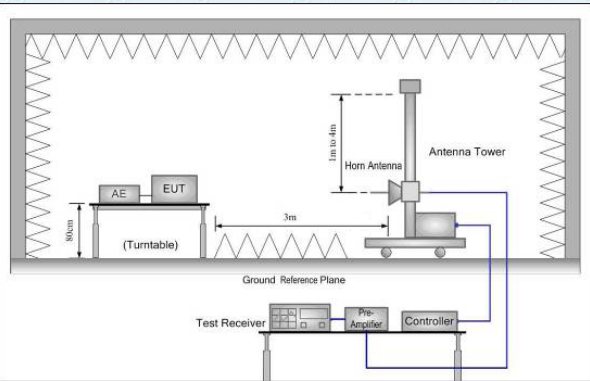
Test Requirement:	EN 55032																								
Test Method:	EN 55032																								
Test Frequency Range:	30MHz to 6GHz																								
Class / Severity:	Class B																								
Test site:	Measurement Distance: 3m																								
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>AV</td> <td>1MHz</td> <td>3MHz</td> <td>Average</td> </tr> </tbody> </table>				Frequency	Detector	RBW	VBW	Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	AV	1MHz	3MHz	Average		
Frequency	Detector	RBW	VBW	Value																					
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																					
Above 1GHz	Peak	1MHz	3MHz	Peak																					
	AV	1MHz	3MHz	Average																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dB<math>\mu</math>V/m @3m)</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>30MHz-230MHz</td> <td>40.00</td> <td>Quasi-peak</td> </tr> <tr> <td>230MHz-1GHz</td> <td>47.00</td> <td>Quasi-peak</td> </tr> <tr> <td>1GHz-3GHz</td> <td>70.00</td> <td>Peak</td> </tr> <tr> <td>1GHz-3GHz</td> <td>50.00</td> <td>Average</td> </tr> <tr> <td>3GHz-6GHz</td> <td>74.00</td> <td>Peak</td> </tr> <tr> <td>3GHz-6GHz</td> <td>54.00</td> <td>Average</td> </tr> </tbody> </table>				Frequency	Limit (dB $\mu$ V/m @3m)	Value	30MHz-230MHz	40.00	Quasi-peak	230MHz-1GHz	47.00	Quasi-peak	1GHz-3GHz	70.00	Peak	1GHz-3GHz	50.00	Average	3GHz-6GHz	74.00	Peak	3GHz-6GHz	54.00	Average
Frequency	Limit (dB $\mu$ V/m @3m)	Value																							
30MHz-230MHz	40.00	Quasi-peak																							
230MHz-1GHz	47.00	Quasi-peak																							
1GHz-3GHz	70.00	Peak																							
1GHz-3GHz	50.00	Average																							
3GHz-6GHz	74.00	Peak																							
3GHz-6GHz	54.00	Average																							
Test setup:	<p>Below 1GHz:</p>  <p>Above 1GHz:</p> 																								
Test Procedure:	1. The radiated emissions test was conducted in a semi-anechoic																								

	<p>chamber.</p> <p>2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.</p> <p>3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.</p> <p>4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.</p>
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar
Measurement Record:	<p>Uncertainty: 3.8039dB (30MHz-200MHz)</p> <p>3.9679dB (200MHz-1GHz)</p> <p>4.29dB (1GHz-18GHz)</p>
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Measurement Data


### Below 1GHz:

Test mode:	Operation mode	Antenna Polarity:	Horizontal
------------	----------------	-------------------	------------

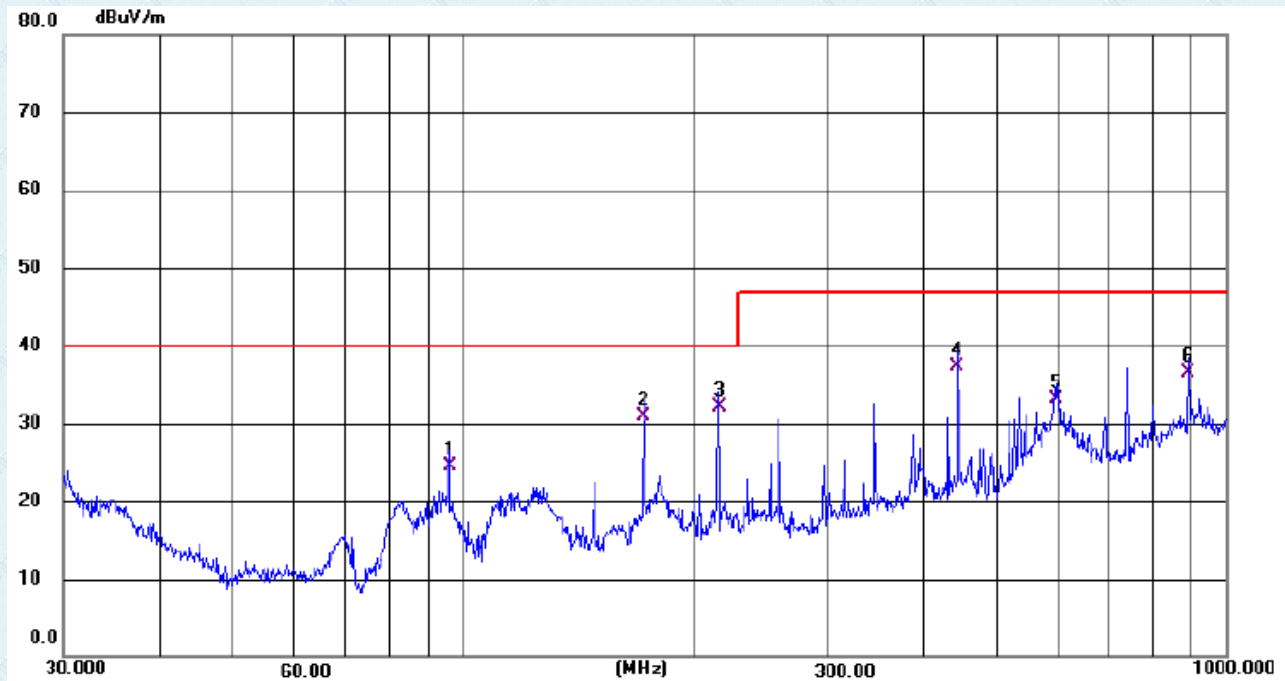

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	96.0985	43.70	-19.23	24.47	40.00	-15.53	QP
2	172.5987	48.33	-17.38	30.95	40.00	-9.05	QP
3 *	216.0239	50.03	-17.93	32.10	40.00	-7.90	QP
4	444.8514	46.70	-9.35	37.35	47.00	-9.65	QP
5	599.3211	40.16	-7.01	33.15	47.00	-13.85	QP
6	890.7277	37.00	-0.50	36.50	47.00	-10.50	QP


Test mode:	Operation mode	Antenna Polarity:	Vertical
------------	----------------	-------------------	----------

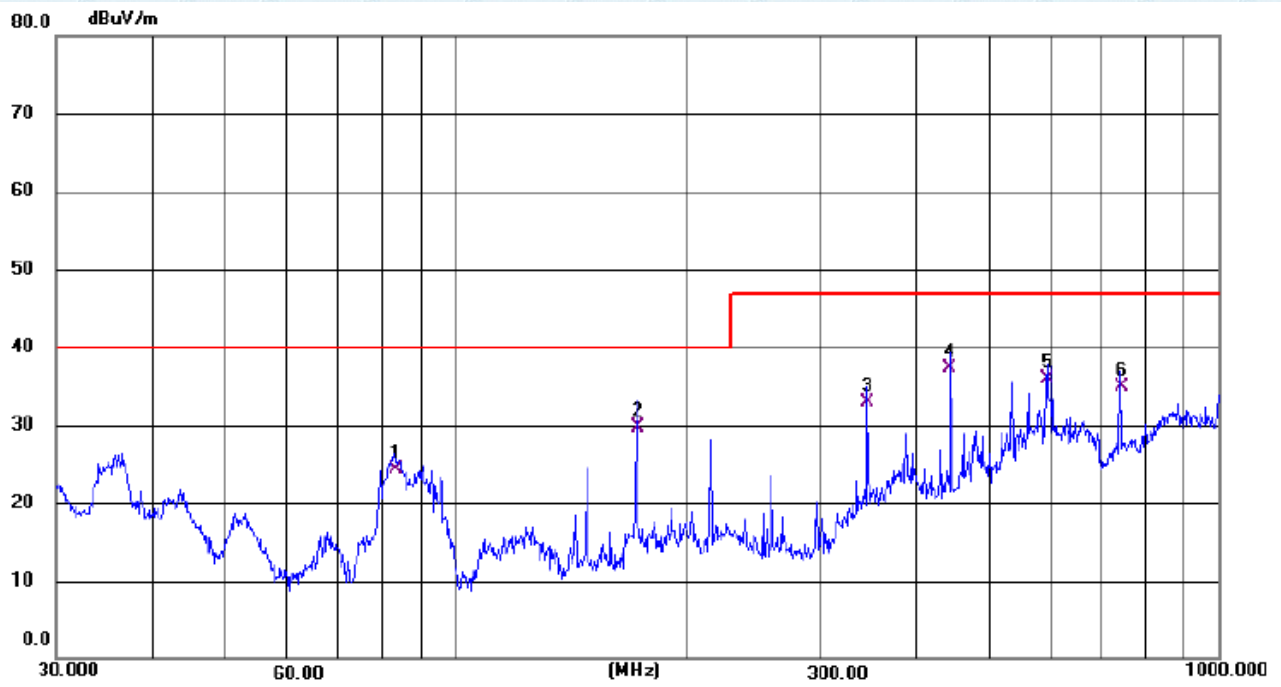

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	83.2298	45.05	-20.84	24.21	40.00	-15.79	QP
2	172.5988	48.46	-18.75	29.71	40.00	-10.29	QP
3	345.5952	43.43	-10.51	32.92	47.00	-14.08	QP
4 *	444.8514	48.11	-10.72	37.39	47.00	-9.61	QP
5	595.1329	42.20	-6.31	35.89	47.00	-11.11	QP
6	742.2587	40.04	-5.11	34.93	47.00	-12.07	QP


**Above 1GHz:**

Test mode:	Operation mode	Antenna Polarity:	Horizontal
------------	----------------	-------------------	------------

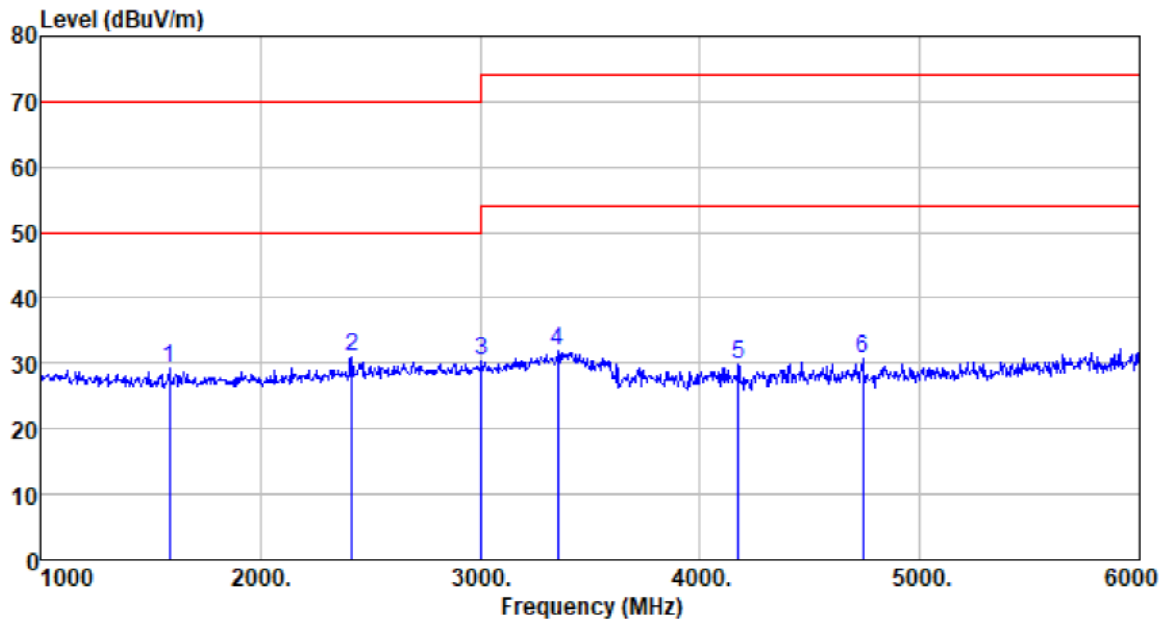

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
1585.000	37.54	25.45	2.32	36.23	29.08	70.00	-40.92	Peak
2415.000	37.40	27.45	2.93	36.87	30.91	70.00	-39.09	Peak
3005.000	35.85	28.40	3.42	37.30	30.37	74.00	-43.63	Peak
3355.000	37.34	28.40	3.63	37.34	32.03	74.00	-41.97	Peak
4175.000	33.28	30.11	4.00	37.47	29.92	74.00	-44.08	Peak
4740.000	32.58	31.09	4.58	37.70	30.55	74.00	-43.45	Peak

Test mode:	Operation mode	Antenna Polarity:	Vertical
------------	----------------	-------------------	----------

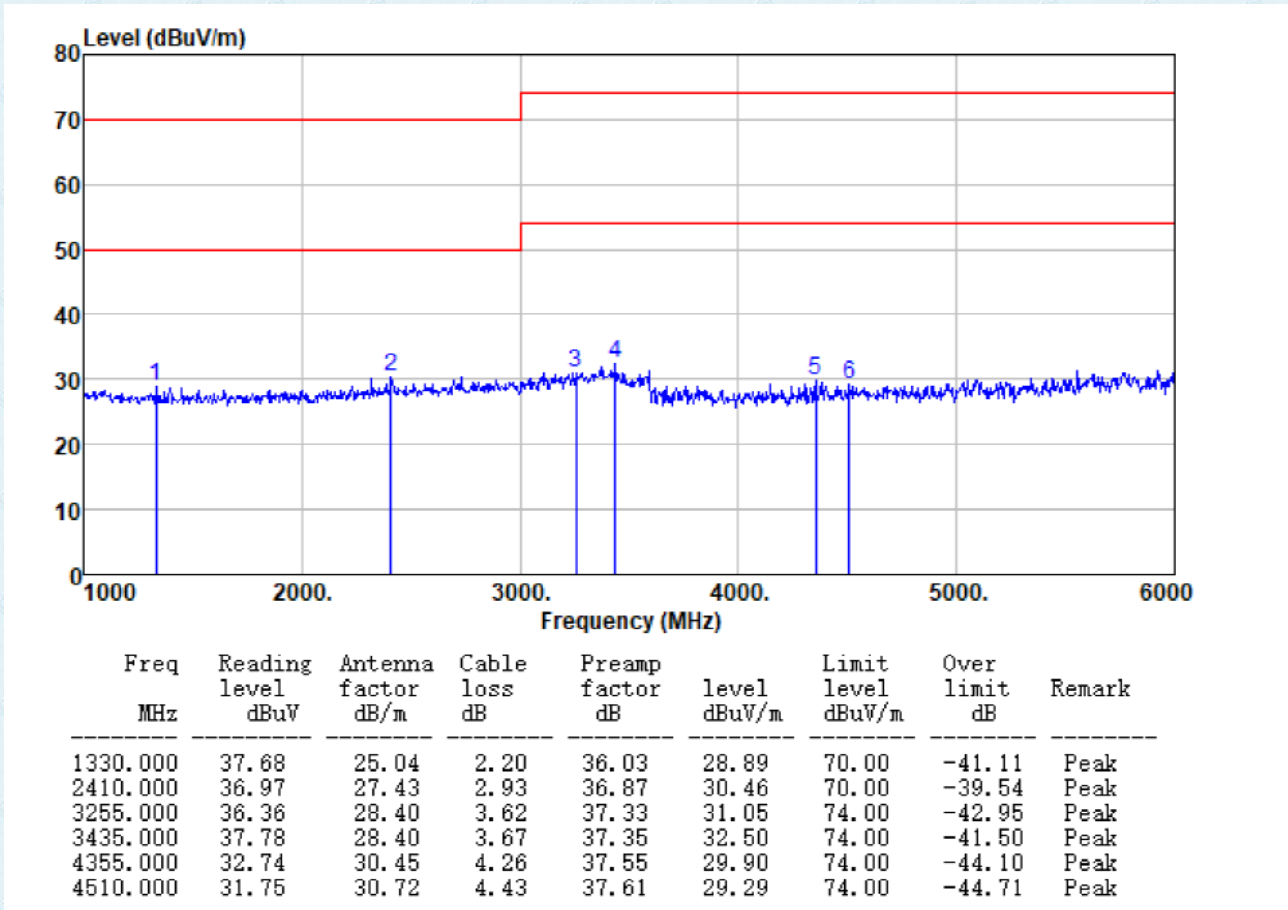

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

## 7.2 Conducted Emission


Test Requirement:	EN 55032																			
Test Method:	EN 55032																			
Test Frequency Range:	150kHz to 30MHz																			
Class / Severity:	Class B																			
Receiver setup:	RBW=9kHz, VBW=30kHz																			
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>						Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB $\mu$ V)																			
	Quasi-peak	Average																		
0.15-0.5	66 to 56*	56 to 46*																		
0.5-5	56	46																		
5-30	60	50																		
Test setup:	<p>Remark:  EUT: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>																			
Test procedure:	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(LISN). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55032 Class B on conducted measurement.</li> </ol>																			
Test environment:	Temp.:	24 °C	Humid.:	51%	Press.:	1012mbar														
Measurement Record:	Uncertainty: 3.44dB																			
Test Instruments:	Refer to section 6 for details																			
Test mode:	Refer to section 5.2 for details																			
Test results:	Pass																			

## Measurement Data

Test mode:	Operation mode	Phase Polarity:	Line
------------	----------------	-----------------	------

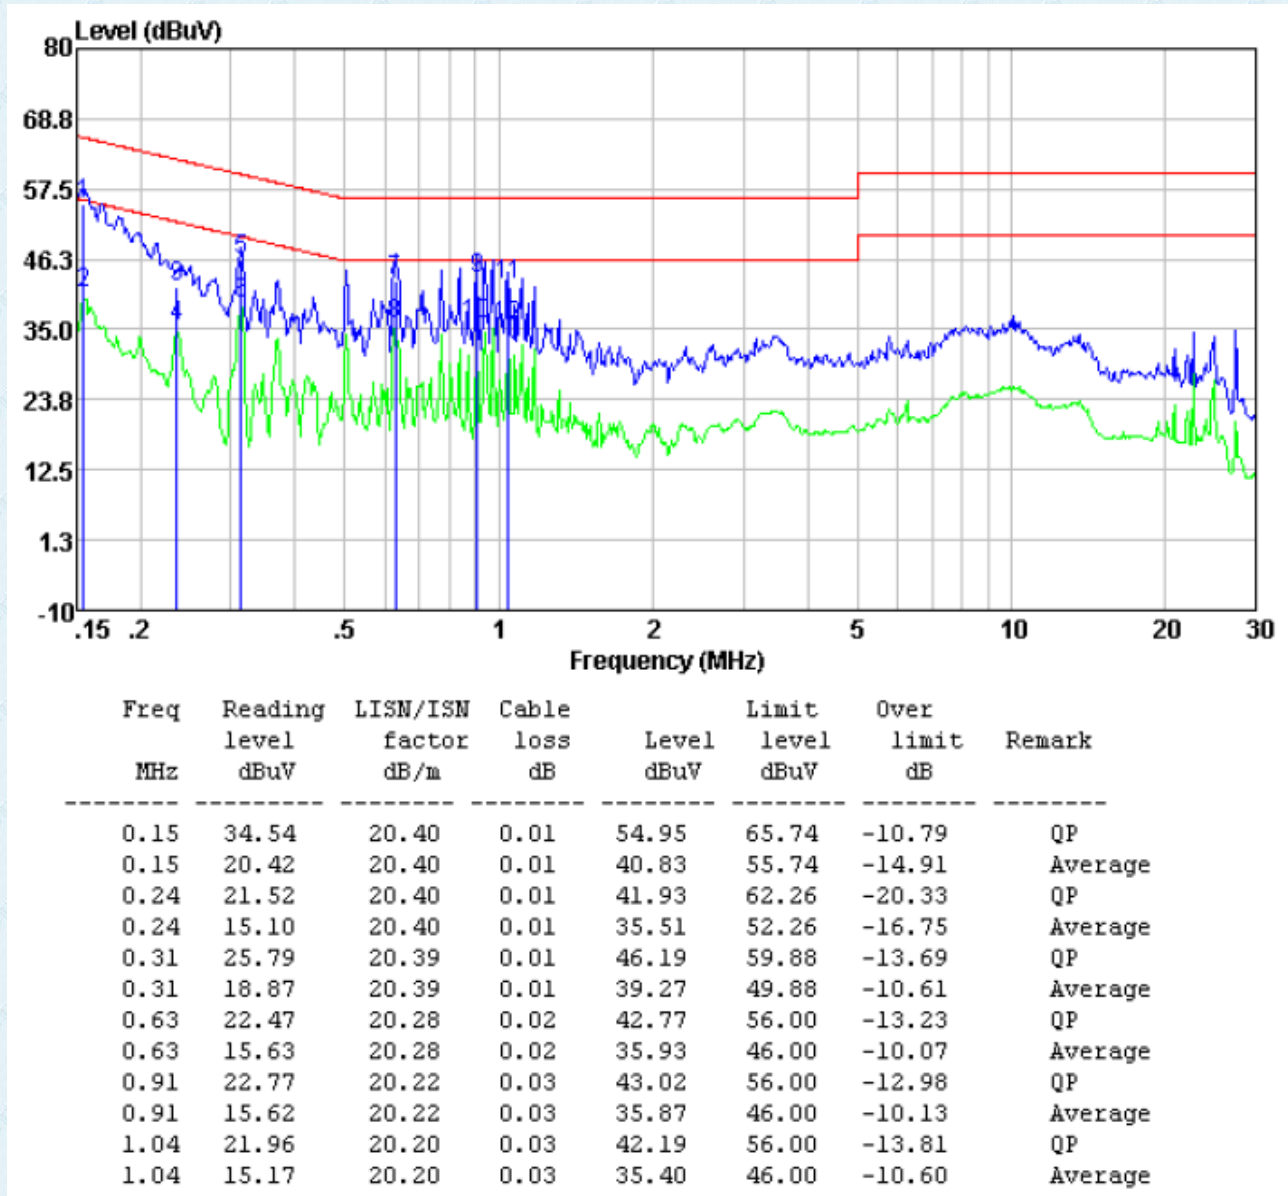

Test mode:	Operation mode	Phase Polarity:	Neutral
------------	----------------	-----------------	---------

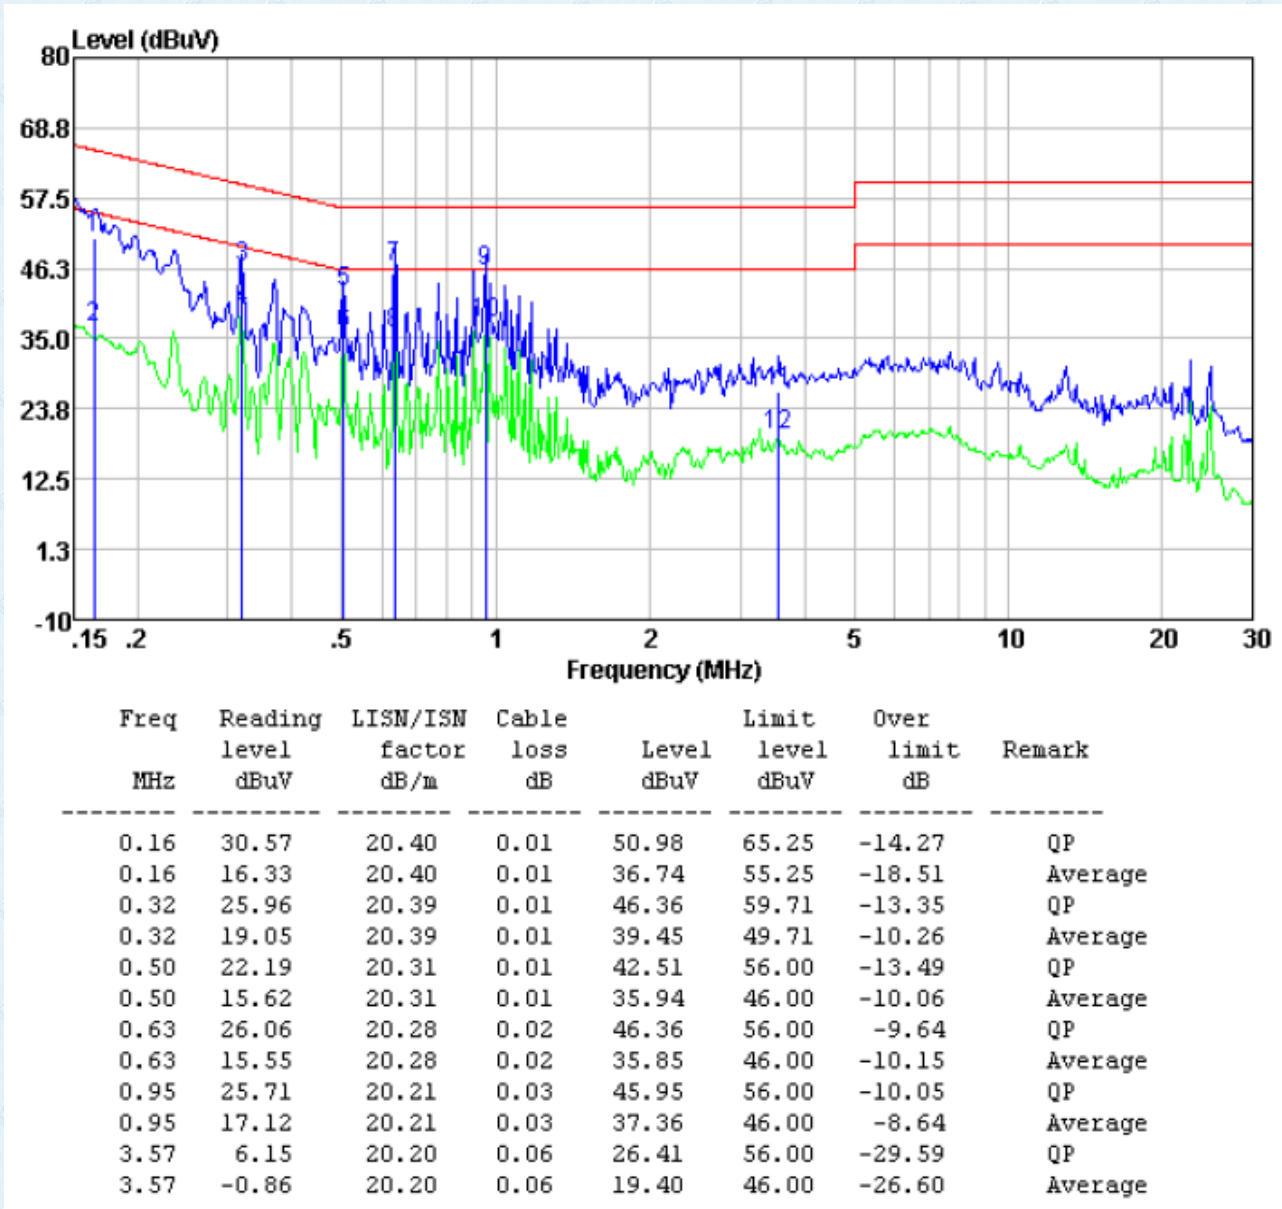

## 7.3 Harmonic Emission

Test Requirement:	EN IEC 61000-3-2
Test Method:	N/A: See Remark Below
Remark	<p>There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN IEC 61000-3-2.</p> <p>For further details, please refer to Clause 7, Note 1 of EN IEC 61000-3-2 which states:          "For the following categories of equipment limits are not specified in this edition of the standard.          Note 1: Equipment with a rated power of 75W or less, other than lighting equipment."</p>

## 7.4 Flicker Emission

Test Requirement:	EN 61000-3-3
Test Method:	EN 61000-3-3
Class/Severity:	Clause 5 of EN 61000-3-3
Measurement Time:	10 min
Detector:	As per EN 61000-3-3
Test environment:	Temp.: 24 °C    Humid.: 51%    Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


	EUT values	Limit	Result
Pst	0.028	1.00	PASS
Plt	0.028	0.65	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.058	4.00	PASS
dt [s]	0.000	0.50	PASS

## 8 Immunity Test Results

### 8.1 Performance Criteria Description in Clause 7 of EN 55035

<p>Criterion A:</p>	<p>During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.</p>
<p>Criterion B:</p>	<p>After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p> <p>If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.</p>
<p>Criterion C:</p>	<p>During and after testing, a temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

## 8.2 Electrostatic discharge

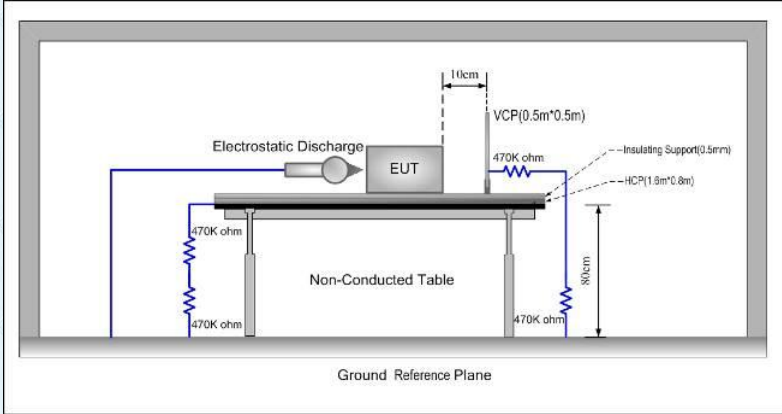Test Requirement:	EN 55035
Test Method:	EN 61000-4-2
Discharge Voltage:	Contact Discharge: $\pm 4\text{kV}$ Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ HCP/VCP: $\pm 4\text{kV}$
Polarity:	Positive & Negative
Number of Discharge:	Contact Discharge: Minimum 10 times at each test point, Air Discharge: Minimum 10 times at each test point.
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Performance Criterion:	Criterion B
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li><b>Air discharge:</b> The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure was repeated until all the air discharge completed</li> <li><b>Contact Discharge:</b> The test was applied on conductive surfaces of EUT. the generator was re-triggered for a new single discharge and repeated 25 times for each pre-selected test point. the tip of the discharge electrode was touch the EUT before the discharge switch was operated.</li> <li><b>Indirect discharge for horizontal coupling plane</b> At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge. Consideration should be given to exposing all sides of the EUT.</li> <li><b>Indirect discharge for vertical coupling plane</b> At least 10 single discharges were applied to the center of one vertical</li> </ol>

	edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Record:

Test points:	I: N/A			
	II: All plastic seams			
<b>Direct discharge</b>				
Discharge Voltage (KV)	Type of discharge	Test points	Observations Performance	Result
± 4	Contact	I	N/A	N/A
± 2, ± 4, ± 8	Air	II	A	Pass
<b>Indirect discharge</b>				
Discharge Voltage (KV)	Type of discharge	Test points	Observation Performance	Result
± 4	HCP-Bottom/Top/ Front/Back/Left/Right	Edge of the HCP	A	Pass
± 4	VCP-Bottom/Top/ Front/Back/Left/Right	Center of the VCP	A	Pass

Remark:

*Performance Criteria: A, B, C: Refer to section 8.1 for details*

### 8.3 Radio-frequency electromagnetic field Amplitude modulated

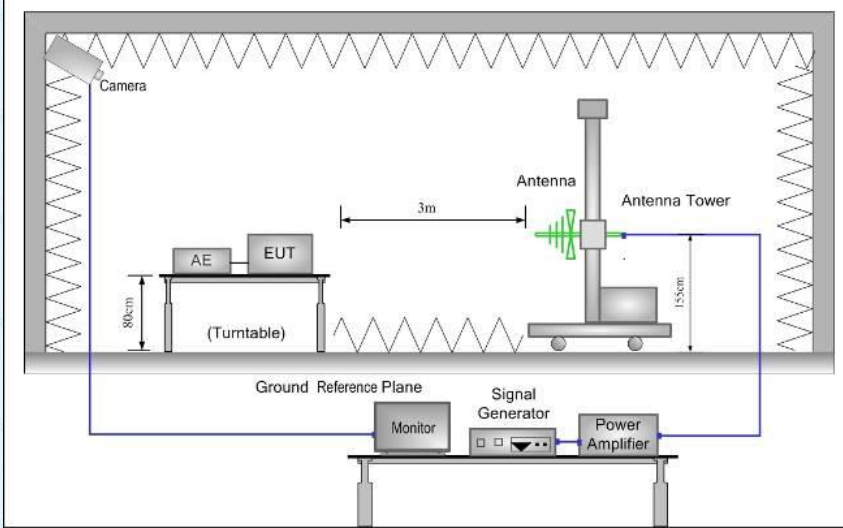Test Requirement:	EN 55035
Test Method:	EN 61000-4-3
Frequency range:	80MHz to 5GHz
Test Level:	3V/m
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criterion A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li>1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items.</li> <li>2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length.</li> <li>3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area).</li> <li>4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value.</li> <li>5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s.</li> <li>6. The test normally was performed with the generating antenna facing each side of the EUT.</li> <li>7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned</li> </ol>


	vertically and again with the antenna positioned horizontally. 8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Measurement Record:**

Frequency	Level	Modulation	Antenna Polarization	EUT Face	Observations (Performance Criterion)	Result
80 MHz-1 GHz	3 V/m	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=3seconds	V	Front	A	Pass
			H		A	Pass
			V	Rear	A	Pass
			H		A	Pass
			V	Left	A	Pass
			H		A	Pass
			V	Right	A	Pass
			H		A	Pass
			V	Top	A	Pass
			H		A	Pass
			V	Bottom	A	Pass
			H		A	Pass
1800MHz, 2600MHz 3500MHz 5000MHz	3 V/m	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=2seconds	V	Front	A	Pass
			H		A	Pass
			V	Rear	A	Pass
			H		A	Pass
			V	Left	A	Pass
			H		A	Pass
			V	Right	A	Pass
			H		A	Pass
			V	Top	A	Pass
			H		A	Pass
			V	Bottom	A	Pass
			H		A	Pass

Remark: Performance Criteria: A, B, C: Refer to section 8.1 for details

## 8.4 Electrical fast transients

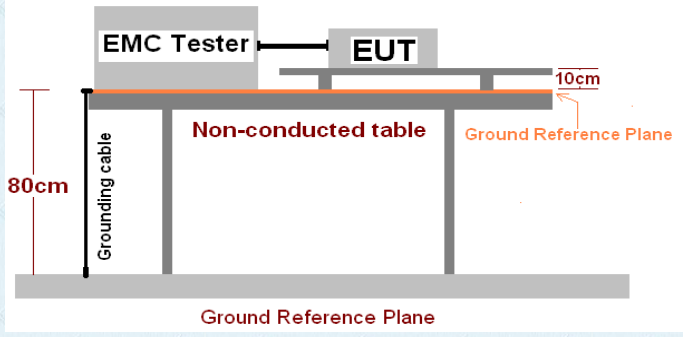Test Requirement:	EN 55035
Test Method:	EN 61000-4-4
Test Level:	1.0kV
Polarity:	Positive & Negative
Test signal specification:	Rise time=5ns, Duration time=50ns; Burst Duration=15ms, Burst Period=300ms; Repetition Frequency=5KHz
Test Duration:	2 minute per level & polarity
Performance Criterion:	Criterion B
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness.</li> <li>2. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m.</li> <li>3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.</li> <li>4. The length of power lines between the coupling device and the EUT is 0.5m</li> <li>5. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.</li> <li>6. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes.</li> </ol>
Test environment:	Temp.: 26 °C Humid.: 54% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


**Measurement Record:**

Lead under Test	Level ( $\pm$ kV)	Coupling Direct/Clamp	Observations (Performance Criterion)	Result
L	$\pm 1.0$	Direct	A	Pass
N	$\pm 1.0$	Direct	A	Pass
L-N	$\pm 1.0$	Direct	A	Pass

*Remark:*

*Performance Criteria: A, B, C: Refer to section 8.1 for details*

## 8.5 Surges

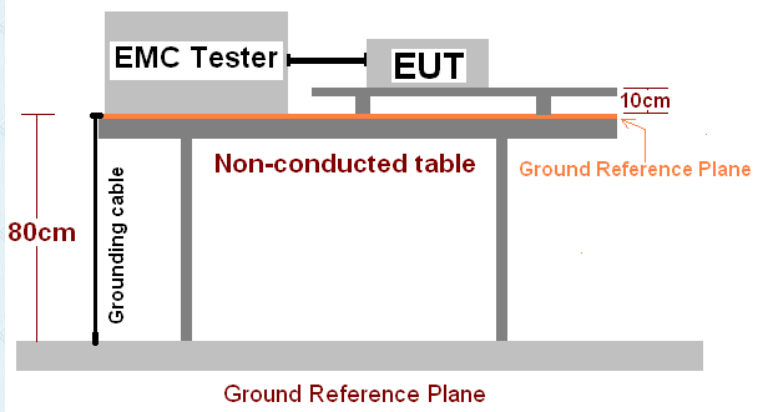Test Requirement:	EN 55035
Test Method:	EN 61000-4-5
Test Level:	1kV line to line: Differential mode 2kV line to earth: Common mode
Polarity:	Positive & Negative
Generator source impedance:	2Ω (line-line coupling) 12Ω (line-earth coupling)
Test signal specification:	Rise time=1.2us, Duration time=50us; Test Interval: 60s between each surge;
No. of surges:	5 positive, 5 negative at 0°, 90°, 180°, 270°.
Performance Criterion:	Criterion B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester and an EUT (Equipment Under Test) are positioned on a non-conducted table. The table is 80cm high and has a 10cm thick top surface. A grounding cable is connected to the table. A ground reference plane is shown below the table.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV.</li> <li>2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.</li> <li>3. Different phase angles are done individually.</li> <li>4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.</li> </ol>
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


**Measurement Record:**

Location	Level(kV)	Pulse No	Surge Interval	Phase(deg)	Observations (Performance Criterion)	Result
L-N	± 1	5	60s	0°	B	Pass
				90°	B	Pass
				180°	B	Pass
				270°	B	Pass

*Remark:*

*Performance Criteria: A, B, C: Refer to section 8.1 for details.*

## 8.6 Radio-frequency continuous conducted

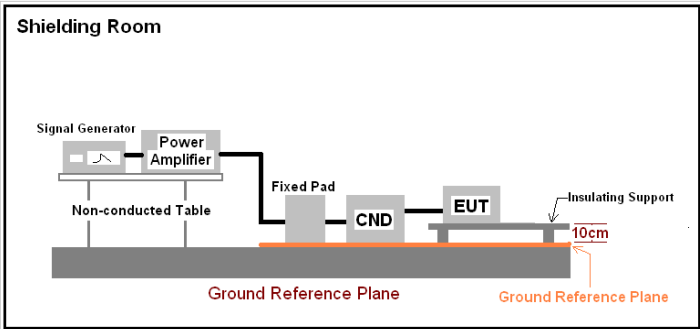Test Requirement:	EN 55035
Test Method:	EN 61000-4-6
Frequency range:	0.15MHz to 80MHz
Test Level:	3V rms on AC Ports (unmodulated emf into 150 Ω)
Performance Criterion:	Criterion A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).</li> <li>2. The disturbance signal described below is injected to EUT through CDN.</li> <li>3. The EUT operates within its operational mode(s) under intended climatic conditions after power on.</li> <li>4. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.</li> </ol>
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Record:

Level	Injected Position	Modulation	Observations (Performance Criterion)	Result
3(0.15MHz-10MHz)	CDN	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=2seconds	A	Pass
3 to 1 (10MHz-30MHz, Lines)				
1 (30MHz-80MHz)				

Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details.

## 8.7 Voltage dips and Voltage interruptions

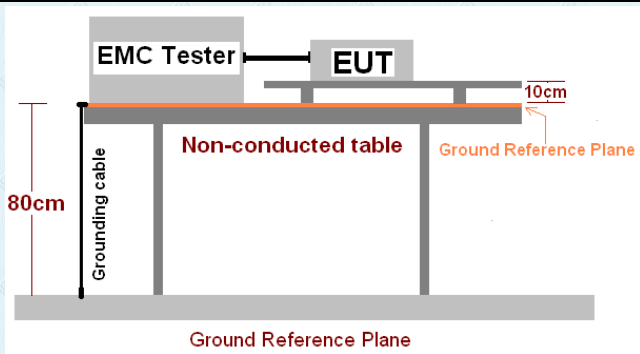Test Requirement:	EN 55035
Test Method:	EN 61000-4-11
Test Level:	0% of VT(Supply Voltage) for 0.5 period 70% of VT(Supply Voltage) for 25 period 0% of VT(Supply Voltage) for 250 period
Number of Dips / Interruptions:	3 per Level
Performance Criterion:	>95% VD, 0.5 period----Performance criterion: B 30% VD, 25 period----Performance criterion: C >95% VI, 250 period----Performance criterion: C
Test setup:	 <p>The diagram shows a test setup on a non-conducted table. The table is 80cm high. An EMC Tester and EUT are placed on top of the table. The distance between the EMC Tester and EUT is 10cm. A Ground Reference Plane is indicated below the table.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT and test generator were setup as shown on above setup photo.</li> <li>The interruptions are introduced at selected phase angles with specified duration.</li> <li>Record any degradation of performance.</li> </ol>
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Record:

Test Level % $U_T$	Duration (Periods)	Phase angle	No. of drop out	Time between dropout	Observations (Performance Criterion)	Result
0	0.5	0°, 90°, 180°, 270°	3	10s	A	Pass
70	25	0°, 90°, 180°, 270°	3	10s	A	Pass
0	250	0°, 90°, 180°, 270°	3	10s	C	Pass

Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details.

## 9 Test Setup Photo

Radiated Emission



## Conducted Emission



## Electrostatic discharge



## Harmonic/Flicker



## EFT/ Surges/ Voltage dips and interruptions





CS



## 10 EUT Constructional Details



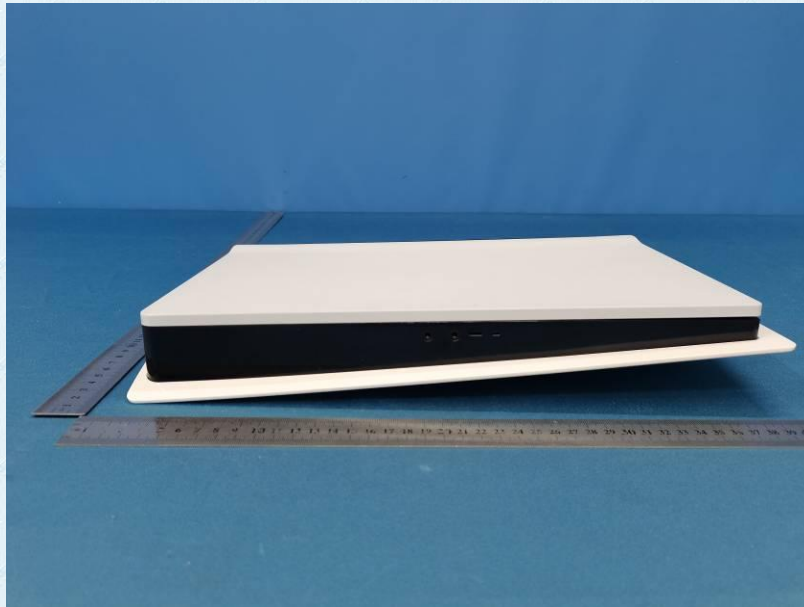

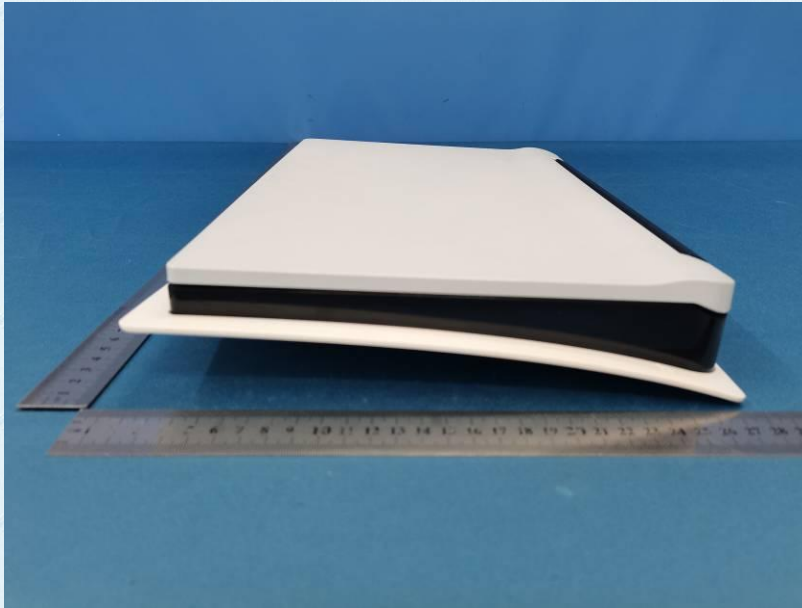









-----End-----