说明书尺寸：70*100mm

REMOTE CONTROL DUAL SOURCE LIGHT BAR

USER MANUAL

LED DIMMABLE
SCREEN LAMP With eye Protection

MODEL: LI-HY-0214-GY

ANTI-GLARE
EYE PROTECTED
NO MULTI-SHADOW
SERVICE LIFE 50,000 hrs

RoHS COMPLIANT CE UK CA FC

PRODUCT INTRODUCTION

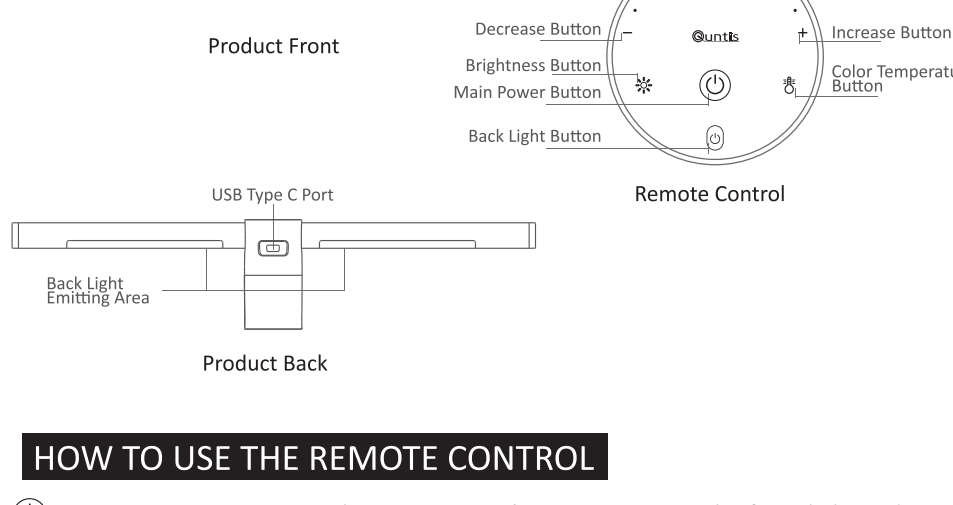

HOW TO USE THE REMOTE CONTROL

- **Main Power Button:** Tap the Main Power button to turn on the front light and back light simultaneously. To turn off all lights, tap the Main Power button again. **[Memory function]** The brightness and color temperature settings of the front light will be memorized automatically.If the front light was on before the power outage, it will automatically turn on when power is restored, and memorize the brightness and color temperature before the power outage.
- **Back Light Button:** Tap the Back Light button to turn on/off the back light. Long press for stepless adjustment of back light brightness.
- **Brightness button:** Tap the Brightness button to activate brightness mode. The indicator will light up when the brightness control is on. Then press the "+" button to increase the brightness, or press the "-" button to decrease the brightness.
- **Color temperature button:** After short pressing this button to switch to color temperature mode, press" +" or" -" button to adjust color temperature.
- – **Decrease button:** Short press: 4 levels of brightness or color temperature reduction; long press: stepless brightness or color temperature reduction.
- + **Increase button: Short press:** 4 levels of brightness or color temperature increase; long press: stepless brightness or color temperature increase.

INSTALLATION INSTRUCTIONS

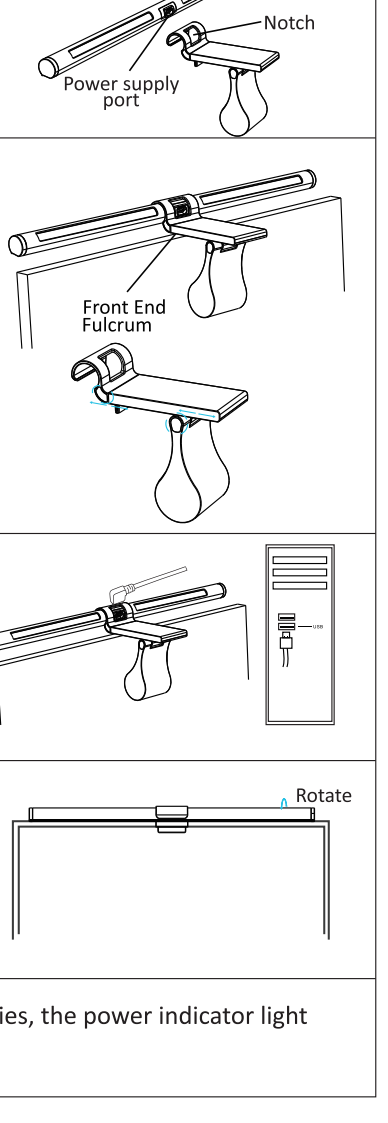

(1).Take out the lamp bar, with the front light emitting area facing down.

(2).Take out the bracket, align the power supply port of the head section with the notch at the end of the bracket clamp, and gently snap it on.

(3). Stretch the horizontal portion of the adjustable clamp back and forth to accommodate the thickness of the screen, followed by hanging the light in the center position above the screen.

(Special note: the front pivot point of the bracket must be close to the front of the screen)

(4).Take out the USB power cable, insert the Type-C interface into the power port of the lamp holder, and plug the other end of the USB into the USB interface or 5V adapter on the rear panel of the chassis.

(5).Hold down the bracket with one hand (to prevent it from falling), and rotate the light body with the other hand to adjust the angle of the light head illumination until the light does not shine directly into your eyes that is the completion of the installation.

(6).Take out the remote control, install the batteries, the power indicator light up can be used normally.

PAIRING/UNPAIRING

Friendly reminder: Pairing has been completed at the factory, customers can use it directly.

Pairing: Connect power to the lamp, immediately hold down the main power button for about 4 seconds to start pairing. The front light will flash twice to indicate successful pairing.

Unpairing: Connect power to the lamp, immediately hold down the brightness button for about 7 seconds to unpair. The front light will flash four times to indicate successful unpairing.

When pairing, please complete the operation within 12 seconds after the product is powered on. If the time exceeds, pairing might not be successful. If pairing is not successful, try unpairing first and then pairing again.

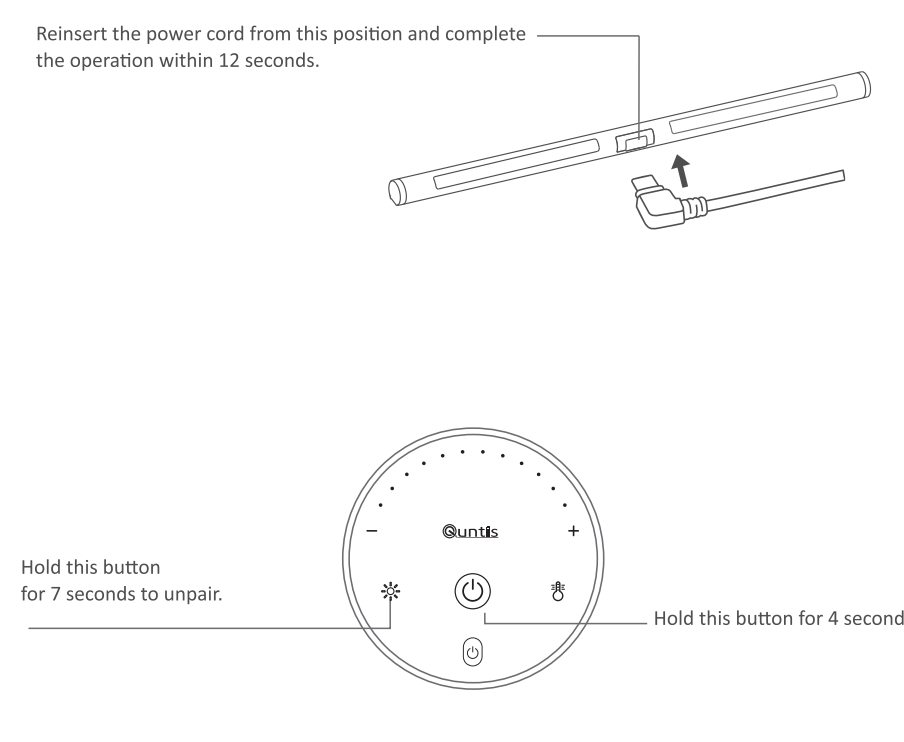

PRODUCT SPECIFICATIONS

Product Net Weight:	Approximately 580g
Input Voltage:	DC 5V
Product Model:	LI-HY-0214-GY
Power:	7.5W
Input Current:	1500mA
Lamp Body Size:	20*410MM
Light Source Type:	LED Light Source
Remote Control Power:	3*AA batteries
Color Rendering Index:	95Ra
Color Temperature:	Front light has 12 levels of adjustment. Back light 3600K
Number of LEDs:	84 (Front light 72 X 0.2W/LED module + Back light 12 X 0.2W/LED module)

PRECAUTIONS

1. If the lamp blinks after turned on, try using other USB ports on the computer or replace the adapter.
2. It is recommended to power this product using the USB port on the back panel of a computer case.
3. Please use a power adapter with an output voltage of 5V and a current of 1.5A or above to ensure that the lamp can operate normally.
4. Please use the original power cord. Do not use USB extension cords or splitters, as this may cause abnormal operation of the lamp.
5. If a voltage adapter exceeding 5V is used to power this product, it may cause damage and safety hazards.
6. Do not use the product in unstable environments to prevent it from falling and causing damage to the lamp or posing other risks.

モニター掛け式ライト 背光機能・無線リモコン付き

取扱説明書

LED調光可能
スクリーン バーライト
モデル番号：LI-HY-0214-GY

製品各部の説明

ボタンの操作説明

取り付け説明

1．ライト本体の正面を下に向けます。

2．ライト本体の入力ポートをクリップ末端の切れ込み口に合わせて軽く押し込んでください。

リモコンのペアリングの方法/ペアリングの解除

ご注意：製品は工場出荷時に既にペアリングが完了しますから、お客様は直接に使用できます。

ペアリングの方法： ライトを通電したら、オン・オフボタンを約4秒間で押し続けると、ペアリングが開始されます。ライト本体が2回点滅すると、ペアリング成功の表示です。

ペアリングの解除： ライトを通電したら、明るさボタンを約7秒間押し続けると、ペアリングが解除されます。ライト本体が4回点滅すると、ペアリング解除成功の表示です。

製品仕様

製品重さ：	約580g
入力電圧：	DC 5V
製品モデル	LI-HY-0214-GY
パワー：	7.5W
入力電流：	1500mA
サイズ：	20*410mm
光源タイプ：	LED
リモコン電源：	単三電池＊３本
演色性：	95Ra
色温度：	ライト本体 2700K/3300K/4100K/5200K 背光ライト：3600K

使用上のご注意

FERNBEDIENUNG DOPPELQUELLE LICHTLEISTE

BENUTZERHANDBUCH

DIMMBARE LED
BILDSCHIRMLAMPE mit Augenschutz
MODELL: LI-HY-0214-GY

PRODUKTEINFÜHRUNG

FUNKTIONSBESCHREIBUNG

INSTALLATIONSANLEITUNG

PAARUNG/ENTPAARUNG

PRODUKTSPEZIFIKATIONEN

HINWEISE

BARRE LUMINEUSE À DOUBLE SOURCE AVEC TÉLÉCOMMANDE

MANUEL D'UTILISATION

LED réglable
Lampe de bureau avec protection oculaire
MODÈLE : LI-HY-0214-GY

PRÉSENTATION DU PRODUIT

DESCRIPTION DES FONCTIONNALITÉS

INSTRUCTIONS D'INSTALLATION

APPAIRAGE/DÉSAPPAIRAGE

SPÉCIFICATIONS DU PRODUIT

REMARQUES

BARRE LUMINOSA A DOPPIA FONTE CON TELECOMANDO

MANUALE DELL'UTENTE

Dimmerabile a LED
Lampada da scrivania con protezione per gli occhi
MODELLO: LI-HY-0214-GY

PRESENTAZIONE DEL PRODOTTO

DESCRIZIONE DELLE FUNZIONALITÀ

ISTRUZIONI PER L'INSTALLAZIONE

ABBINAMENTO/DISABBINAMENTO

SPECIFICHE DEL PRODOTTO

REMARQUES

BARRA DE LUZ DE DOBLE FUENTE CON CONTROL REMOTO

MANUAL DEL USUARIO

LED regulable
Lámpara de escritorio con protección ocular
MODELO: LI-HY-0214-GY

PRESENTACIÓN DEL PRODUCTO

DESCRIPCIÓN DE LAS FUNCIONES

INSTRUCCIONES DE INSTALACIÓN

EMPAREJAMIENTO/DESEMPAREJAMIENTO

PARÁMETROS DEL PRODUCTO

CONSIDERACIONES

AFSTANDSBEDIENING DUBBELE LICHTBALK MET AFSTANDSBEDIENING

GEBRUIKSAANWIJZING

Led dimbaar
Schermlamp met oogbescherming
MODEL: LI-HY-0214-GY

PRODUCTINTRODUCTIE

FUNCTIEBESCHRIJVING

INSTALLATIE-INSTRUCTIES

KOPPELEN/ONTKOPPELEN

PRODUCTSPECIFICATIES

OVERWEGINGEN

BARRA DE LUZ DE DUAS FONTES COM CONTROLE REMOTO

MANUAL DO USUÁRIO

LED DIMERIZÁVEL
LÂMPADA DE TELA
MODEL: LI-HY-0214-GY

INTRODUÇÃO DO PRODUTO

DESCRIÇÃO DA FUNÇÃO

INSTRUÇÕES DE INSTALAÇÃO

PAR/DESPAR DE CONTROLE REMOTO

ESPECIFICAÇÕES DO PRODUTO

NOTAS IMPORTANTES