



Bedienungsanleitung

Kohlefilter



Instruction Manual

Charcoal filter



**Abbildung zeigt das Modell CF110**  
**Illustration shows model CF110**

## Inhalt / Index

1. Einbau Kohlefilter .....	2
2. Geräteliste.....	4
1. Installation carbon filter .....	7
2. List of devices.....	9

Sehr geehrter Kunde! Sehr geehrte Kundin! Wir möchten Ihnen herzlich danken, dass Sie sich zum Erwerb eines Produkts aus unserem reichhaltigen Angebot entschieden haben. Lesen Sie die gesamte Bedienungsanleitung, bevor Sie das Gerät zum ersten Mal benutzen.

### 1. Einbau Kohlefilter

**Kohlefilter: CF110, CF115, CF130, CF135, CF140, CF145, CF150, CF155, CF160, CF170, CF180, CF190  
C02, C04, C06, C09**


#### **HINWEIS:**

- **Verwenden Sie Schutzhandschuhe!**
- **Vor Montage Netzstecker ziehen!**
- **Kohlefilter nur im Umluftbetrieb verwenden!**



Der Kohlefilter enthält keine problematischen Schadstoffe und kann über die Restmülltonne entsorgt werden.

#### Schritt 1

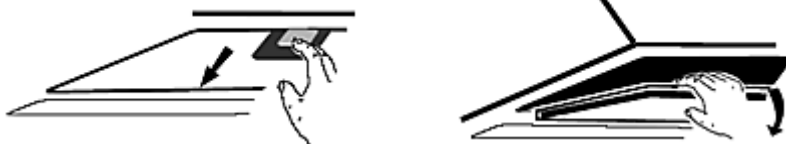


Entfernen Sie den/die Fettfilter. **Die Kohlefilter werden auf beiden Seiten des Motorgehäuses befestigt.**

#### Schritt 2


Sollte sich die Netzanschlussdose innerhalb der Kaminverkleidung befinden, müssen Sie evtl. die

Kaminverkleidung abbauen, um an die Anschlussdose heran zu kommen.

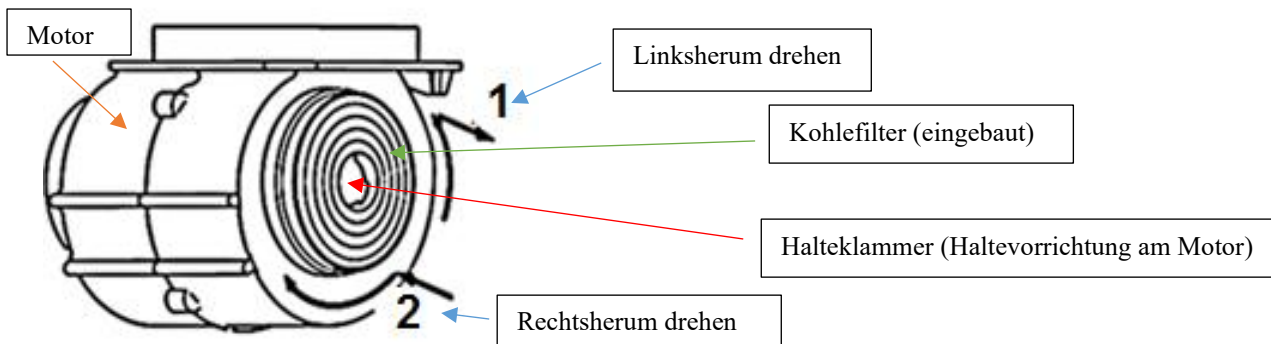

1. Nach links drehen = Der darauf befindliche Kohlefilter wird zum Entfernen nach links gedreht
2. Nach rechts drehen = Der Kohlefilter wird auf den Motor gesetzt und leicht nach rechts gedreht oder geruckelt bis er festsitzt.

### Schritt 3

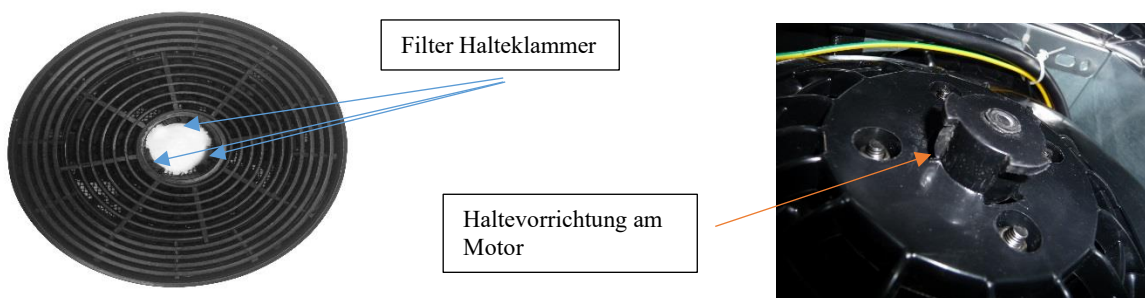

Setzen Sie den Kohlefilter mit der Haltevorrichtung (Halteklammern) seitlich an den Motor und drehen Sie, bis der Filter einrastet.

### Schritt 4

Befestigen Sie die Metall/Alu-Filter wieder.

**Tip:** Wechseln Sie die Kohlefilter (je nach Benutzung der Haube) alle drei bis sechs Monate. Reinigen Sie die Fettfilter regelmäßig für einen einwandfreien Betrieb des Motors)



Bestellen Sie die Kohlefilter unter  
[www.pkm-online.de](http://www.pkm-online.de)

**! WARNUNG!** Befestigen Sie den Kohlefilter sicher und ordnungsgemäß. Ansonsten kann sich der Kohlefilter lockern und somit Gefahren verursachen.

**HINWEIS!** Die Abzugsleistung verringert sich bei eingebauten Kohlefiltern. Kohlefilter sind nicht Teil des Lieferumfangs.

## 2 Geräteliste

<b>Artikelbezeichnung</b>	<b>Artikel.Nr.</b>	<b>Kohlefilter/Artikel Nr.</b>
BS36-60AIXPH	50794	2 x CF150 (50440)
BS38-60ABPH	50796	1 x CF150 (50440)
BS38-60AWPH	50795	1 x CF150 (50440)
BS47-60ABTH	50797	2 x CF150 (50440)
S13-60BWPY	50821	2 x CF140 (50510)
S23-60ABPX2	50849	1 x CO4 (50223)
DSH60-BL	50662	1 x CO4 (50223)
KH-60KH-S	50586	2 x CF130 (50053)
KH9039H	50829	2 x CF130 (50053)
KH-GSH-60B	50596	2 x CF140 (50510)
KHS20-60H	50830	2x CF150 (50440)
KHS34-80	50862	1 x CO4 (50223)
KHU-60EB	50548	2 x CF130 (50053)
KHU-60EB2X	50759	1 x CO4 (50223)
KHU-601	50540	1 x CO4 (50223)
KHU-602	50541	1 x CO6 (50405)
KHU-602-H	50585	2 x CF152 (50032)
KHU-603	50547	2 x CF110 (50007)
KHUBH3001X	50863	1x CO4 (50223)
UBH5000SX	50831	1 x CO6 (50405)
S22-60BBPYL	50836	2 x CF140 (50510)
S22-60BWPYL	50837	2 x CF140 (50510)
S23-60AWPX	50832	1 x CO4 (50223)
S47-60ABTH	50858	2 x CF150 (50440)
S47-60AWTH	50858	2 x CF150 (50440)
6004BH	50839	2 x CF150 (50440)
6004W	50430	2 x CF150 (50440)
6090-2H	50458	2 x CF130 (50053)
6091BH	50838	2 x CF130 (50053)
6091H	50163	2 x CF130 (50053)
8060GZ	50346	2 x CF110(50007)
8090GZ	50347	2 x CF110 (50007)
8099GISZ	50355	2 x CF110 (50007)
8099 ISZ	50331	2 x CF110 (50007)
9004W	50448	2 x CF150 (50440)
9031X	50369	1 x CO4 (50223)
9031XS	50368	1 x CO4 (50223)
9039X	50371	1 x CO4 (50223)
9039XW	50370	1 x CO4 (50223)
9039Y1	50778	2 x CF155 (50753)

9040-60BZ	50340	2 x CF110 (50007)
9040-90BZ	50341	2 x CF110 (50007)
9041-60HBG	50784	2 x CF130 (50053)
9041-80HBG	50785	2 x CF130 (50053)
9080BZ N	50455	2 x CF110 (50007)
9080WZ N	50456	2 x CF110 (50007)
9090-2H N	50466	2 x CF130 (50053)
FS1-60BSPY	50659	2 x CF140 (50510)
FS2-60BBGTY	50744	2 x CF140 (50510)
GS1-60CIXPH	50467	2 x CF130 (50053)
P1-60BBTX	50711	1x CF125 (50761)
S2-90ABTZ	50534	2 x CF 110 (50007)
S3-60_ABTZ	50452	2 x CF110 (50007)
S3-90ABTZ	50453	2 x CF110 (50007)
S7-60ABTH	50489	2 x CF110 (50007)
S7-90ABTH	50491	2 x CF110 (50007)
S8-60A++IXTW	50656	2 x CF180 (50867)
S8-90A++IXTW	50657	2 x CF180 (50867)
S9-60 ABTZ	50624	2x CF110 (50007)
S9-80 ABTZ	50623	2x CF 110 (50007)
S13-60BBPH	50842	2x CF150 (50440)
S13-60BBPY	50509	2 x CF140 (50510)
S20-60 ABTY	50636	2 x CF 145 (50652)
S20-60 AWTY	50638	2 x CF145 (50652)
S20-60ABTH	50855	2 x CF150 (50440)
S20-60AWTH	50856	3 x CF150 (50440)
S20-90 ABTY	50637	2 x CF145 (50652)
S20-90 AWTY	50639	2 x CF145 (50652)
S20-90ABTH	50857	2 x CF150 (50440)
S21-60ABTH	50858	2 x CF150 (50440)
S21-60 ABTY	50671	2 x CF145 (50652)
S21-60AWTH	50859	2 x CF150 (50440)
S21-60 AWTY	50672	2 x CF145 (50652)
S21-90ABTH	50860	2 x CF150 (50440)
S21-90 ABTY	50673	2 x CF145 (50652)
S21-90 AWTY	50674	2 x CF145 (50652)
S22-60 BBPY	50582	2 x CF140 (50510)
S23-60 ABPX	50622	1 x C04 (50223)
S23-60 ABPY	50745	2 x CF155 (50753)
S25-60ABTH	50632	2 x CF110 (50007)
S25-60AWTH	50633	2 x CF110 (50007)
S26-50BBTY	50640	2 x CF140 (50510)
S26-60BBTY	50643	2 x CF140 (50510)
S26-60BWTY	50642	2 x CF140 (50510)
S26-90BBTY	50643	2 x CF140 (50510)

S28-60 BBPY	50676	2 x CF140 (50510)
S28-60 BWPY	50677	2 x CF140 (50510)
S33-60A+BTH	50692	2 x CF115 (50696)
S33-90A+BTH	50695	2 x CF115 (50696)
S34-60 ABT2X	50748	1 x CO4 (50223)
S34-80ABT2X	50749	1 x CO4 (50223)
S50-60ABP	50850	2 x CF170 (50866)
S50-90ABP	50851	2 x CF170 (50866)
T1-60A++IXEZ	50454	2 x CF110 (50007)
T1-90A++IXEZ	50463	2 x CF110 (50007)
UBH3001X	50336	1 x CO4 (50223)
UBH4060-2H	50468	2 x CF110 (50007)
UBH5000H2	50608	1 x CF152 (50032)
W EB1-52AIXPY	50713	2 x CF 145 (50652)
W S4-60A++BTZ	50727	2 x CF110 (50007)
W S4-90A++BTZ	50722	2 x CF110 (50007)
W S4-90A++WTZ	50717	2 x CF110 (50007)
W S5-60 ABTZ	50728	2 x CF110 (50007)
W S5-60 AWTZ	50729	2 x CF110 (50007)
W S5-80 ABTZ	50731	2 x CF110 (50007)
W T2-90A++IXTZ	50736	2 x CF110 (50007)

Dear Customer, Thank you for purchasing one of our many quality products. Please read this entire manual before using your device for the first time.

## 1. Installation carbon filter


Carbon filter: **CF110, CF115, CF130, CF135, CF140, CF145, CF150, CF155, CF160, CF170, CF180, C02, C04, C06**

- **NOTE**  
Use protective gloves!
- Disconnect the mains plug before installation!
- Only use the charcoal filter in recirculation mode!



The carbon filter does not contain any problematic pollutants and can be disposed of in the residual waste garbage can.


### Step 1

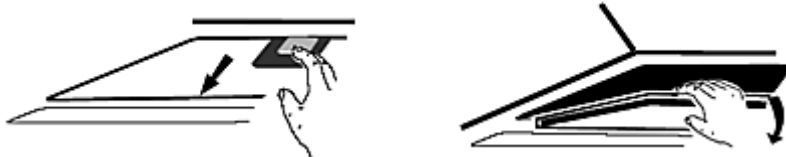

Remove the grease filter(s). The carbon filters are attached to both sides of the motor housing.


### Step 2

If the mains connection socket is located inside the fireplace cladding, you may have to remove the fireplace cladding to access the connection socket.

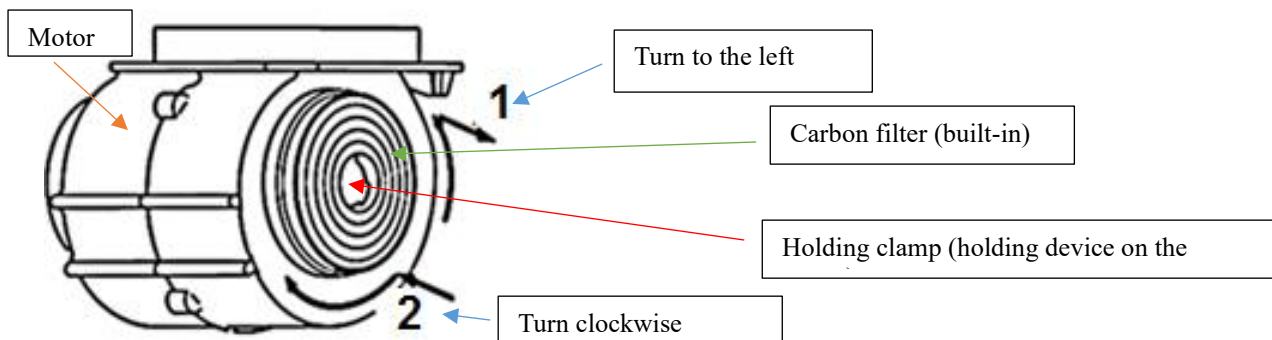

2. Turn to the left = The carbon filter on it is turned to the left for removal
3. Turn to the right = The carbon filter is placed on the motor and turned or jerked slightly to the right until it is firmly in place.

Step 3

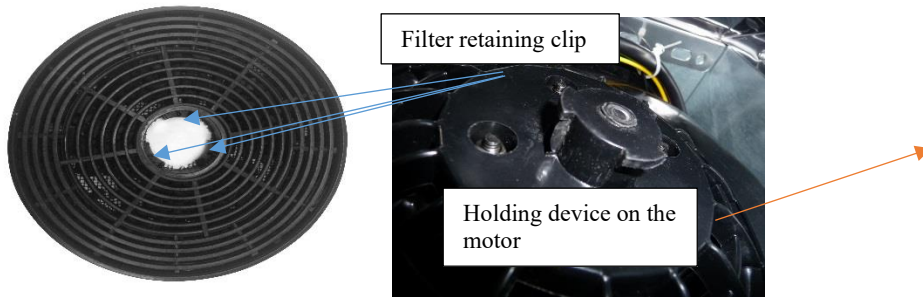

Place the carbon filter with the retaining device (retaining clips) on the side of the motor and turn until the filter clicks into place.

Step 4

Reattach the metal/aluminum filters.

**Tip:** Change the charcoal filters (depending on how the hood is used) every three to six months. Clean the grease filters regularly to ensure proper operation of the motor)



Order the carbon filters at  
[www.pkm-online.de](http://www.pkm-online.de)

**⚠ WARNING!** Attach the charcoal filter securely and properly. Otherwise, the charcoal filter may become loose and cause danger.

**NOTE!** The extraction capacity is reduced if carbon filters are installed. Carbon filters are not included in the scope of delivery.



## 2. List of devices

<b>item description</b>	<b>Artikel.Nr.</b>	<b>Charcoal Filter /Artikel Nr.</b>
BS36-60AIXPH	50794	2 x CF150 (50440)
BS38-60ABPH	50796	1 x CF150 (50440)
BS38-60AWPH	50795	1 x CF150 (50440)
BS47-60ABTH	50797	2 x CF150 (50440)
S13-60BWPY	50821	2 x CF140 (50510)
S23-60ABPX2	50849	1 x CO4 (50223)
DSH60-BL	50662	1 x CO4 (50223)
KH-60KH-S	50586	2 x CF130 (50053)
KH9039H	50829	2 x CF130 (50053)
KH-GSH-60B	50596	2 x CF140 (50510)
KHS20-60H	50830	2x CF150 (50440)
KHS34-80	50862	1 x CO4 (50223)
KHU-60EB	50548	2 x CF130 (50053)
KHU-60EB2X	50759	1 x CO4 (50223)
KHU-601	50540	1 x CO4 (50223)
KHU-602	50541	1 x CO6 (50405)
KHU-602-H	50585	2 x CF152 (50032)
KHU-603	50547	2 x CF110 (50007)
KHUBH3001X	50863	1x CO4 (50223)
UBH5000SX	50831	1 x CO6 (50405)
S22-60BBPYL	50836	2 x CF140 (50510)
S22-60BWPYL	50837	2 x CF140 (50510)
S23-60AWPX	50832	1 x CO4 (50223)
S47-60ABTH	50858	2 x CF150 (50440)
S47-60AWTH	50858	2 x CF150 (50440)
6004BH	50839	2 x CF150 (50440)
6004W	50430	2 x CF150 (50440)
6090-2H	50458	2 x CF130 (50053)
6091BH	50838	2 x CF130 (50053)
6091H	50163	2 x CF130 (50053)
8060GZ	50346	2 x CF110(50007)
8090GZ	50347	2 x CF110 (50007)
8099GISZ	50355	2 x CF110 (50007)
8099 ISZ	50331	2 x CF110 (50007)
9004W	50448	2 x CF150 (50440)
9031X	50369	1 x CO4 (50223)
9031XS	50368	1 x CO4 (50223)
9039X	50371	1 x CO4 (50223)
9039XW	50370	1 x CO4 (50223)

9039Y1	50778	2 x CF155 (50753)
9040-60BZ	50340	2 x CF110 (50007)
9040-90BZ	50341	2 x CF110 (50007)
9041-60HBG	50784	2 x CF130 (50053)
9041-80HBG	50785	2 x CF130 (50053)
9080BZ N	50455	2 x CF110 (50007)
9080WZ N	50456	2 x CF110 (50007)
9090-2H N	50466	2 x CF130 (50053)
FS1-60BSPY	50659	2 x CF140 (50510)
FS2-60BBGTY	50744	2 x CF140 (50510)
GS1-60CIXPH	50467	2 x CF130 (50053)
P1-60BBTX	50711	1x CF125 (50761)
S2-90ABTZ	50534	2 x CF 110 (50007)
S3-60_AB TZ	50452	2 x CF110 (50007)
S3-90ABTZ	50453	2 x CF110 (50007)
S7-60ABTH	50489	2 x CF110 (50007)
S7-90ABTH	50491	2 x CF110 (50007)
S8-60A++IXTW	50656	2 x CF180 (50867)
S8-90A++IXTW	50657	2 x CF180 (50867)
S9-60 ABTZ	50624	2x CF110 (50007)
S9-80 ABTZ	50623	2x CF 110 (50007)
S13-60BBPH	50842	2x CF150 (50440)
S13-60BBPY	50509	2 x CF140 (50510)
S20-60 ABTY	50636	2 x CF 145 (50652)
S20-60 AWTY	50638	2 x CF145 (50652)
S20-60ABTH	50855	2 x CF150 (50440)
S20-60AWTH	50856	3 x CF150 (50440)
S20-90 ABTY	50637	2 x CF145 (50652)
S20-90 AWTY	50639	2 x CF145 (50652)
S20-90ABTH	50857	2 x CF150 (50440)
S21-60ABTH	50858	2 x CF150 (50440)
S21-60 ABTY	50671	2 x CF145 (50652)
S21-60AWTH	50859	2 x CF150 (50440)
S21-60 AWTY	50672	2 x CF145 (50652)
S21-90ABTH	50860	2 x CF150 (50440)
S21-90 ABTY	50673	2 x CF145 (50652)
S21-90 AWTY	50674	2 x CF145 (50652)
S22-60 BBPY	50582	2 x CF140 (50510)
S23-60 ABPX	50622	1 x C04 (50223)
S23-60 ABPY	50745	2 x CF155 (50753)
S25-60ABTH	50632	2 x CF110 (50007)
S25-60AWTH	50633	2 x CF110 (50007)
S26-50BBTY	50640	2 x CF140 (50510)
S26-60BBTY	50643	2 x CF140 (50510)
S26-60BWTY	50642	2 x CF140 (50510)

S26-90BBTY	50643	2 x CF140 (50510)
S28-60 BBPY	50676	2 x CF140 (50510)
S28-60 BWPY	50677	2 x CF140 (50510)
S33-60A+BTH	50692	2 x CF115 (50696)
S33-90A+BTH	50695	2 x CF115 (50696)
S34-60 ABT2X	50748	1 x CO4 (50223)
S34-80ABT2X	50749	1 x CO4 (50223)
S50-60ABP	50850	2 x CF170 (50866)
S50-90ABP	50851	2 x CF170 (50866)
T1-60A++IXEZ	50454	2 x CF110 (50007)
T1-90A++IXEZ	50463	2 x CF110 (50007)
UBH3001X	50336	1 x CO4 (50223)
UBH4060-2H	50468	2 x CF110 (50007)
UBH5000H2	50608	1 x CF152 (50032)
W EB1-52AIXPY	50713	2 x CF 145 (50652)
W S4-60A++BTZ	50727	2 x CF110 (50007)
W S4-90A++BTZ	50722	2 x CF110 (50007)
W S4-90A++WTZ	50717	2 x CF110 (50007)
W S5-60 ABTZ	50728	2 x CF110 (50007)
W S5-60 AWTZ	50729	2 x CF110 (50007)
W S5-80 ABTZ	50731	2 x CF110 (50007)
W T2-90A++IXTZ	50736	2 x CF110 (50007)

Änderungen vorbehalten	Subject to alterations
<b>Stand</b>	<b>Updated</b>
23.09.2024	09/23/2024

© PKM GmbH & Co. KG, Neuer Wall 2, 47441 Moers