



PRODUCT SPECIFICATION

USB Standard Charger Model : B441

Revision History


Revision	Date	Initiator	Reason for Change
0.0	15 Mar 2023	CC Li	Initial release

Prepared By	Approved By
CC Li	Vincent Lam
Date: 16 Mar 2023	Date: 16 Mar 2023

GP Batteries

Product Specification

Model no.: B441

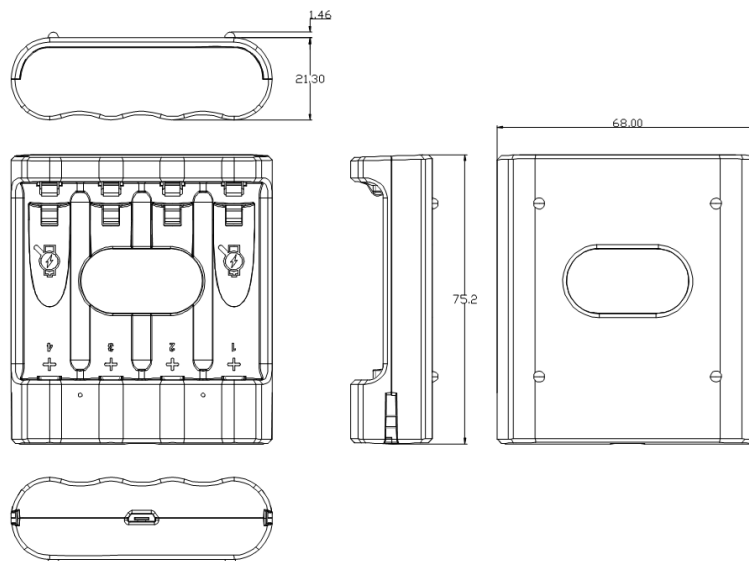

Product Name	: USB 4-Slot Charger B441
Input	: USB Input from DC5V 1A adaptor or Charging Dock (D451, D851, D461 or D861)
Charging Channels	: 2 independent channels ; 2 slots/channel for 2 or 4 pcs AA/AAA NiMH batteries
Output Voltage	: 2.8V
Input from Adaptor	
Charging Current	: 770mA/380mA approx. for charging 1/2 channel AA Ni-MH Batteries 300mA approx. for charging 1 or 2 channel AAA Ni-MH Batteries
Charging Time	: Approx. 180/360 Min for charging 1/2 channel AA 2100mAh Ni-MH Batteries Approx. 200 Min for charging 1 or 2 channel AAA 850mAh Ni-MH Batteries
Input from Charging Dock	
Charging Current	: 900mA/450mA approx. for charging 1/2 channel AA Ni-MH Batteries 400mA/300mA approx. for charging 1/2 channel AAA Ni-MH Batteries
Charging Time	: Approx. 150/300 Min for charging 1/2 channel AA 2100mAh Ni-MH Batteries Approx. 150/200 Min for charging 1/2 channel AAA 850mAh Ni-MH Batteries
Trickle Charging Current	: 100mA/50mA approx for 1/2 channel AA Ni-MH Batteries 80mA/40mA approx for 1/2 channel AAA Ni-MH Batteries
Standby current at no input	: <0.1mA
Operation Temperature	: 0°C to 35°C
LED Indication	: Two Green LEDs ON for 0.5 second after just USB power input Charging in progress - Green LED slow flashing Fully charged – Green LED ON Bad/Primary Batteries inserted – Green LED fast flash Battery Level Check (BLC)* - Green LED ON for Battery Full Green LED Slow Flash for Battery NOT Full

* Insert battery in slot 1 and/or slot 4, it will start BLC mode with green LED indication on corresponding channel as mentioned above and keep for 30s. To recheck BLC, just take out and insert battery again.

GP Batteries

Product Specification

Model no.: B441

Safety protection : 1) Timer protection – 5/10 hours for 1/2 channel charging
2) -dv
3) Temperature cut-off
4) Primary Battery Protection
5) Reverse polarity protection

Dimensions : 68 (L) x 75 (W) x 21.3 (H) mm

Weight : 38 g (approx.)

Certification : CE, UKCA, Rohs, FCC

Warranty Period : 12 months from ex-factory date



Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.



RECYKO
New generation rechargeables

Gratis USB-Ladegerät

Aktion November 2024

Vorabinformation / Vorverkauf



Gratis USB-Ladegerät



Der Winter steht vor der Tür, eine Zeit, in der die Tage kürzer werden und wir mehr Zeit drinnen verbringen. Dies führt zu einem erhöhten Verbrauch von Elektrogeräten, Beleuchtung und Heizung, was die Kosten in die Höhe treibt.

Um Verbraucher in diesen teuren Monaten zu unterstützen und die Hürde für den Umstieg auf wiederaufladbare Batterien zu senken, bietet GP Batteries die Aktion **"GRATIS USB-Ladegerät"** an !



Lieferbar ab November 2024

Gratis USB-Ladegerät



Lieferbar ab November 2024

Gratis USB-Ladegerät



Artikel:	USB-Ladegerät inkl 4x AA 2100 mAh Akkus (geeignet für AA & AAA)	USB-Ladegerät inkl 4x AAA 850 mAh Akkus (geeignet für AAA & AA)
VE	12	12
Artikel-Nr.:	GPRCKCHB441U994	GPRCKCHB441U007
EAN	8716778932994	871677893007

Lieferbar ab November 2024

USP's & Eigenschaften



Lieferumfang



Kompakt und tragbar




Umweltfreundlich



LED Ladestandsanzeige



**Lädt AA- und
AAA-Akkus**

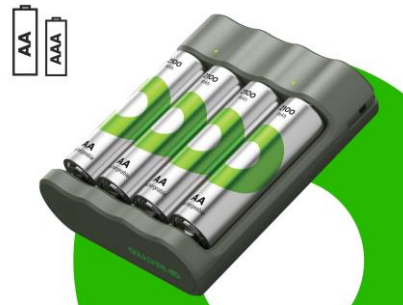

**Schnellladen in
3 Stunden**



LED-Stromanzeige



**Schaltet ab, sobald
die Akkus vollständig
aufgeladen sind**

